
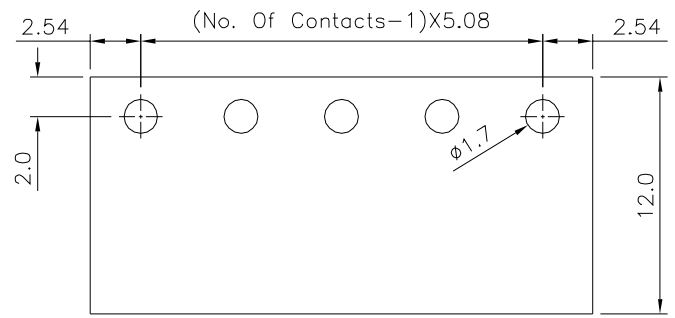


△ SPECIFICATION
 Voltage Rating: 300V AC
 Current Rating: 16A
 Withstanding Voltage: AC 2500V (1 Minute)
 Using Temperature Range: -40°C ~ +105°C
 Soldering Temperature: +250, 5 Seconds Max.
 Solder Pin: Copper Alloy, Tin Plated
 △ Insulator Body (Housing): Polyamide + G.F. (UL94V-0), Green
 RoHS Compliant
 * 02~24P Available

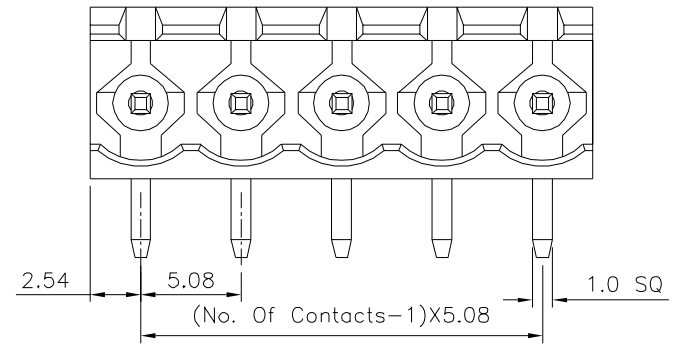

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 3/2/1
 19869
 SCALE NONE

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY HTP
 REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	11/04/2019
2	A2	Modify Data	HZF	08/08/2014
1	A1	Modify Data	HZF	02/17/2012
0	A0	NEW RELEASE	HZF	04/10/2009