
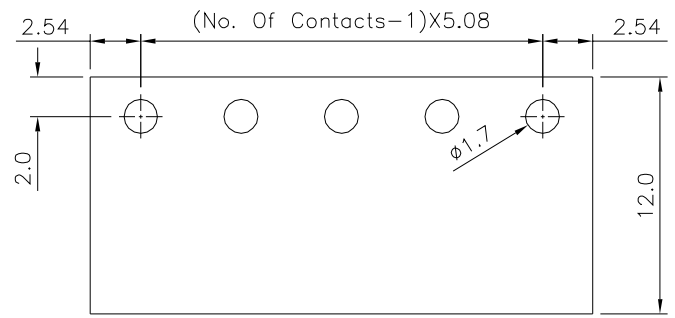


△ SPECIFICATION
 Voltage Rating: 300V AC
 Current Rating: 16A
 Withstanding Voltage: AC 2500V (1 Minute)
 Using Temperature Range: -40°C ~ +105°C
 Soldering Temperature: +250°, 5 Seconds Max.
 Solder Pin: Copper Alloy, Tin Plated
 △ Insulator Body (Housing): Polyamide + G.F. (UL94V-0), Green
 RoHS Compliant
 * 02~24P Available

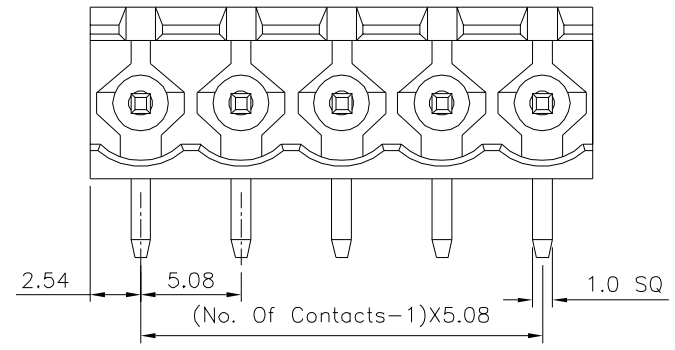

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. <u>3</u> / <u>2</u> / <u>1</u>		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
19885		CHECKED BY HZF		
SCALE NONE		DRAWING BY HTP		
REV.	A3	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	11/04/2019
2	A2	Modify Data	HZF	08/08/2014
1	A1	Modify Data	HZF	02/17/2012
0	A0	NEW RELEASE	HZF	04/10/2009