




△ SPECIFICATION
 Non-Switching Rating:100mA,50V DC
 Switching Rating:25mA,24V DC
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:100 Megaohms Min.
 At 500V DC
 Contact Resistance:50 Milliohms Max.(Initial)
 Operation Temperature:-20°C~+70°C
 Base:PBT(UL94V-0),Black
 Actuator:PBT(UL94V-0),White
 Cover:PBT(UL94V-0),Blue
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

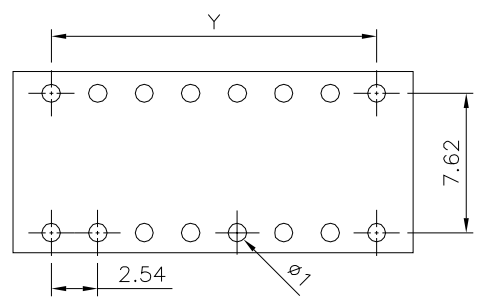



Recommended P.C.B. Layout

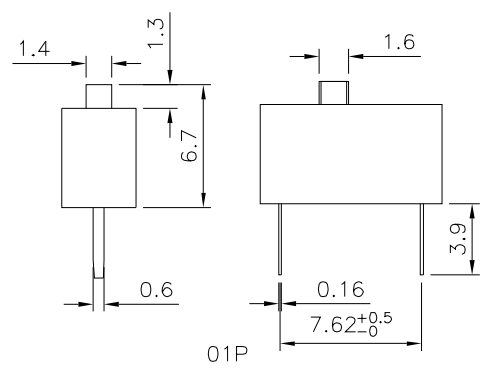



01P

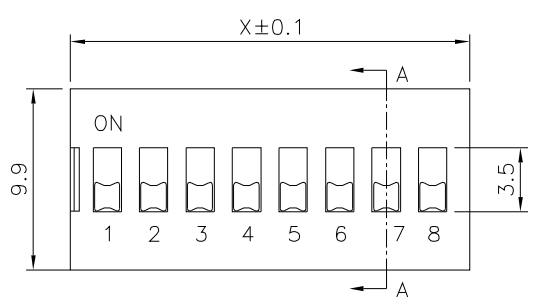


02P

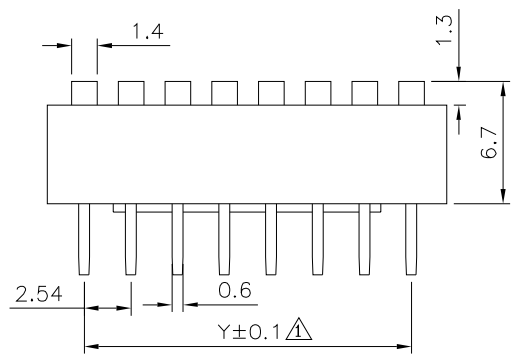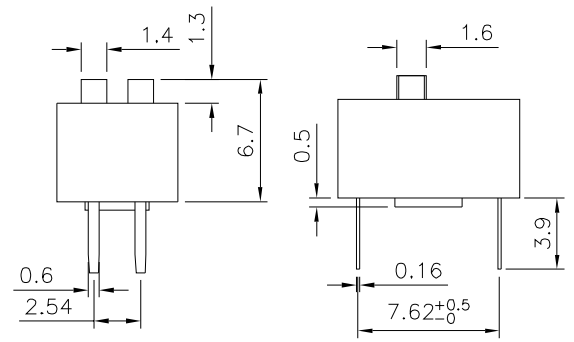

03~12P



Section A-A

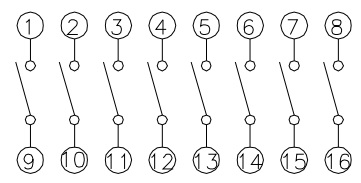

Pin	X	Y
01	4.06	—
02	6.6	2.54
03	9.14	5.08
04	11.68	7.62
05	14.22	10.16
06	16.76	12.7
07	19.3	15.24
08	21.84	17.78
09	24.38	20.32
10	26.92	22.86
12	32	27.94

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X.* ±5* .X ±0.30 .X.* ±3* .XX ±0.20 .XX.* ±2*
19962		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	01/17/2022
△ A0		NEW RELEASE	HZF	08/26/2017