
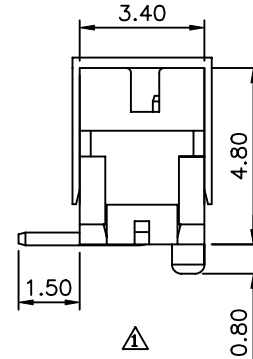
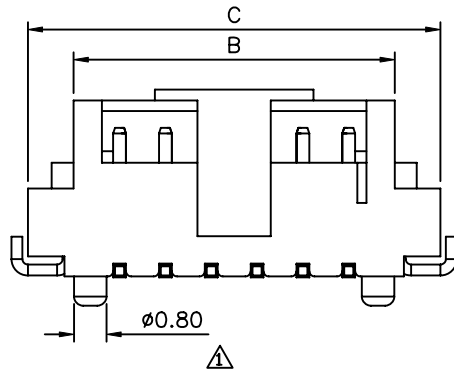
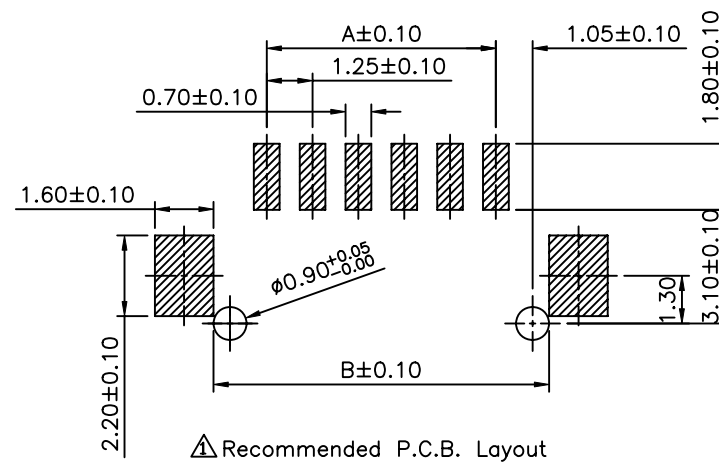


SPECIFICATION

Current Rating:1A AC/DC
Voltage Rating:100V AC/DC
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
Temperature Range:-25°C~+85°C
Pin:Phosphor Bronze,Tin Plated
Solder Tabs:Brass,Tin Plated
Material:PA6T(UL94V-0)
RoHS Compliant

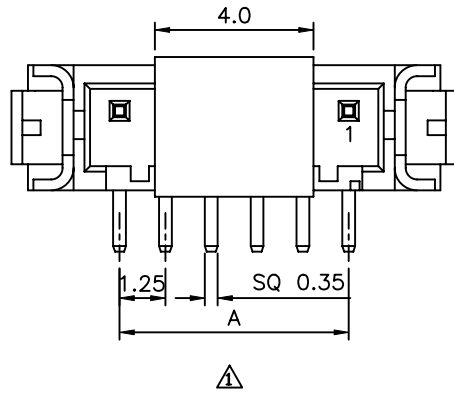

Pin	A	B	C
02	1.25	4.15	6.25
03	2.50	5.40	7.50
04	3.75	6.65	8.75
05	5.00	7.90	10.00
06	6.25	9.15	11.25
07	7.50	10.40	12.50
08	8.75	11.65	13.75
09	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20056

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15


SCALE

NONE

REV.

A1

UNIT
mm



NO. REV.

A1 Modify Data

A0 NEW RELEASE

REVISIONS

CHK


DATE

NO. REV.


REVISIONS

CHK


DATE

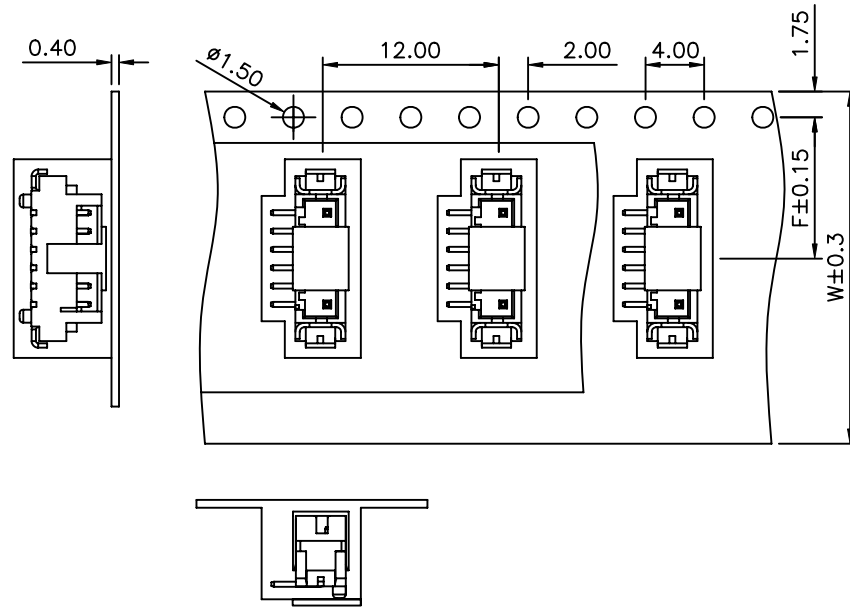

△ Carrier For 2~9Pin

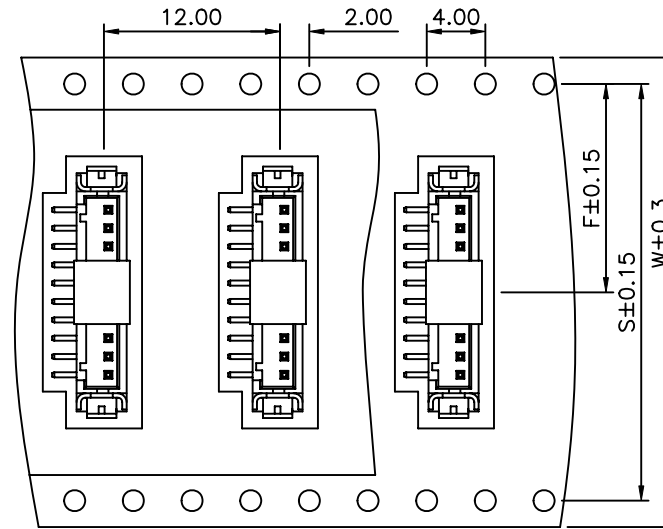

△ Carrier For 10~15Pin

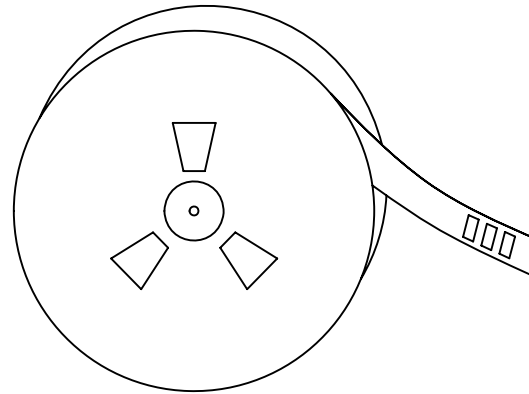

RoHS Compliant

Pin	W	F	S
02	16	7.5	—
03~09	24	11.5	—
10~14	32	14.2	28.40
15	44	20.2	40.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20056

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15


SCALE

NONE

REV.

A1

UNIT
mm



NO. REV.

A1 Modify Data

A0 NEW RELEASE

REVISIONS

CHK

DATE

DATE