
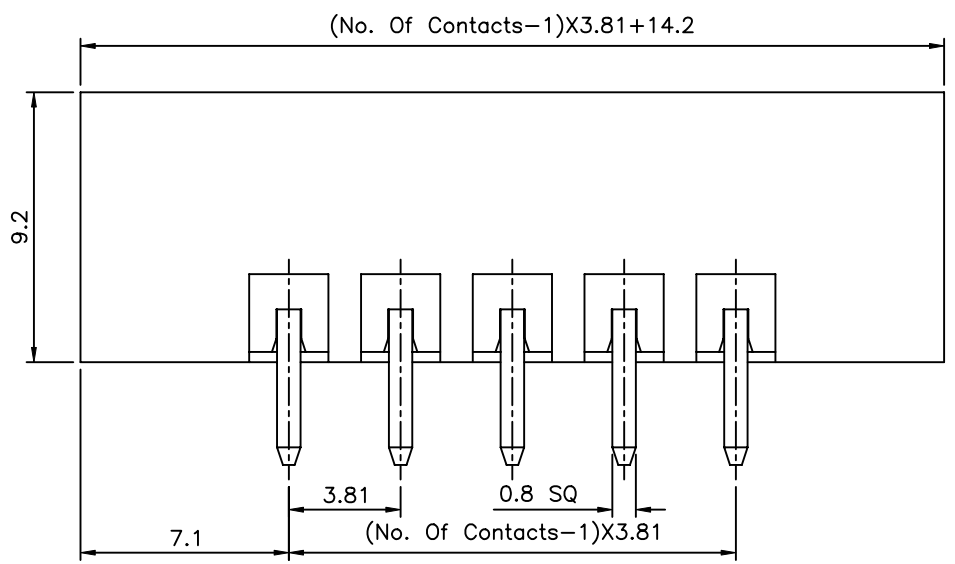
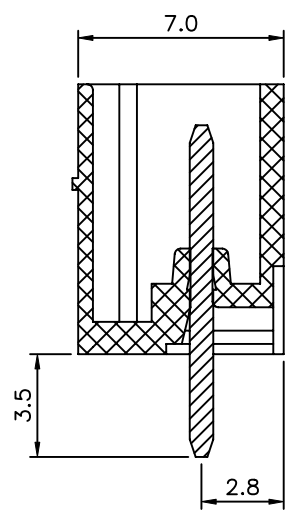


Recommended P.C.B. Layout

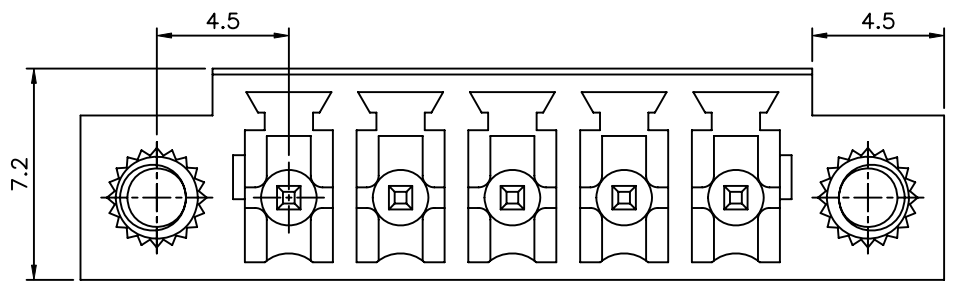

**SPECIFICATION**

Voltage Rating:250V AC  
 Current Rating:8A  
 Insulation Resistance:500 Megaohms At DC 500V  
 Withstanding Voltage:1200V AC For 1 Minute  
 Using Temperature Range:-40°C~+105°C  
 Soldering Temperature:+250°C,5 Seconds Max.  
 Solder Pin:Copper Alloy,Tin Plated  
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X° ±1°
20061		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		QQJ		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	06/24/2010