



△ SPECIFICATION


Current Rating: 7A AC/DC
 Voltage Rating: 250V AC/DC
 Insulation Resistance: 1000 Megohms Min.
 Withstand Voltage: 1500V AC/Minute
 Temperature Range: -25°C~+85°C
 Contact: Brass, Tin Plated Over Nickel
 Insulator: PA66(UL94V-2), White
 Applicable PC Board Thickness: 1.6mm
 RoHS Compliant

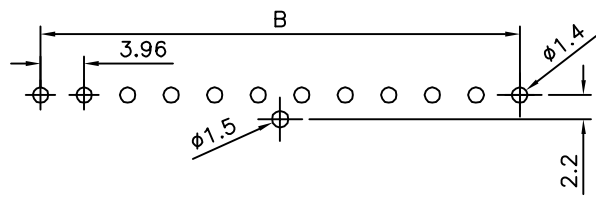


△ Recommended P.C.B. Layout

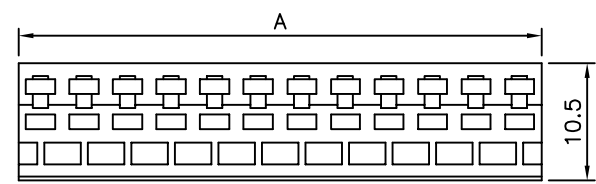

△

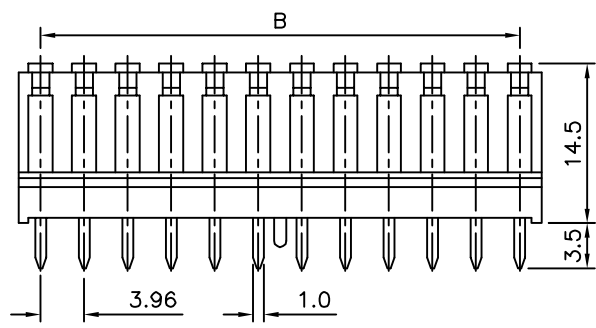

△



△

△ Poles	A	B
6	23.8±0.20	19.8±0.15
12	47.5±0.40	43.56±0.30

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 20124

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 WZL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	05/26/2010
△ A0		NEW RELEASE		