| File No. | 182 | SHEET | 1/1 |
|---|---|---|---|

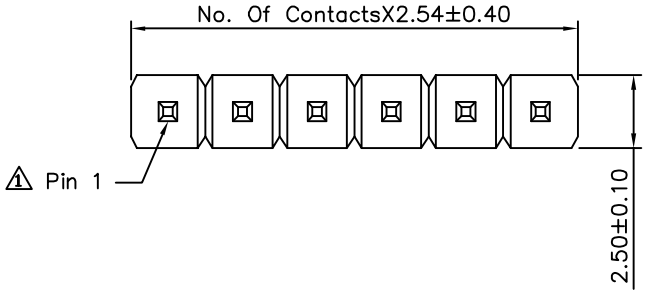


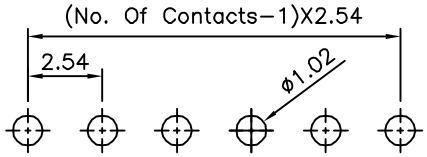


Recommended P.C.B. Layout

1 **SPECIFICATION**

Current Rating:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−55˚C~+105˚C
Housing:PBT(UL94V−0),Black
Contact:Copper Alloy,Gold Flash
RoHS Compliant

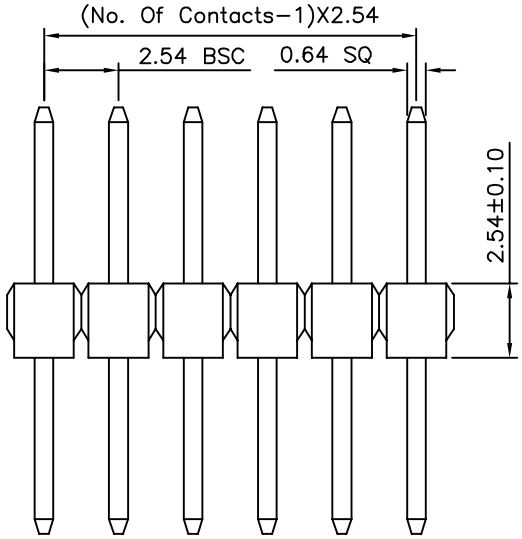


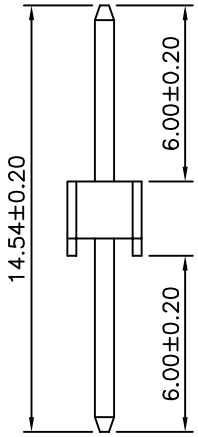


4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. | APPROVED BY | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |
|---|---|---|
| 20216 | MEI | .X ±0.38 |
| | CHECKED BY HZF | .XX ±0.25 |
| | DRAWING BY QQJ | ANG. ±5˚ |
| SCALE NONE | REV. A1 | UNIT mm |

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 1 | A1 | Modify Spec. | HZF | 06/18/2010 |
| 0 | A0 | NEW RELEASE | HZF | 07/13/2008 |