




SPECIFICATION

Current:1.5A Max.
Voltage:30V Max.
Withstand Voltage:500V AC
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-55°C~+85°C
Mating Force:35N Max.
Withdrawal Force:10N Min.
Durability:1500 Cycles Min.
Insulator:PBT+30%G.F.(UL94V-0)

△ Contact:Brass,Gold Flash On Contact Area,Tin
Plated On Solder Tails,Over Nickel

Shell:Brass,Nickel Plated Over All
Back Shell:SPCC,Nickel Plated Over All
RoHS Compliant

Insulator Color	Item No.
White	15764
Black	20227

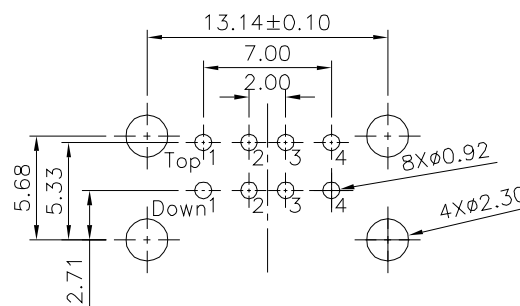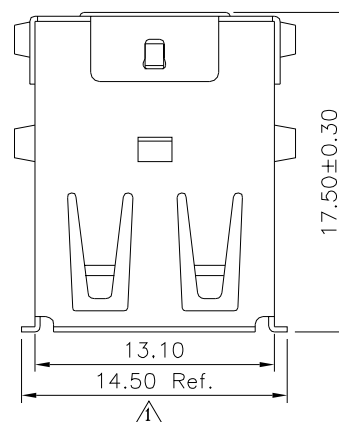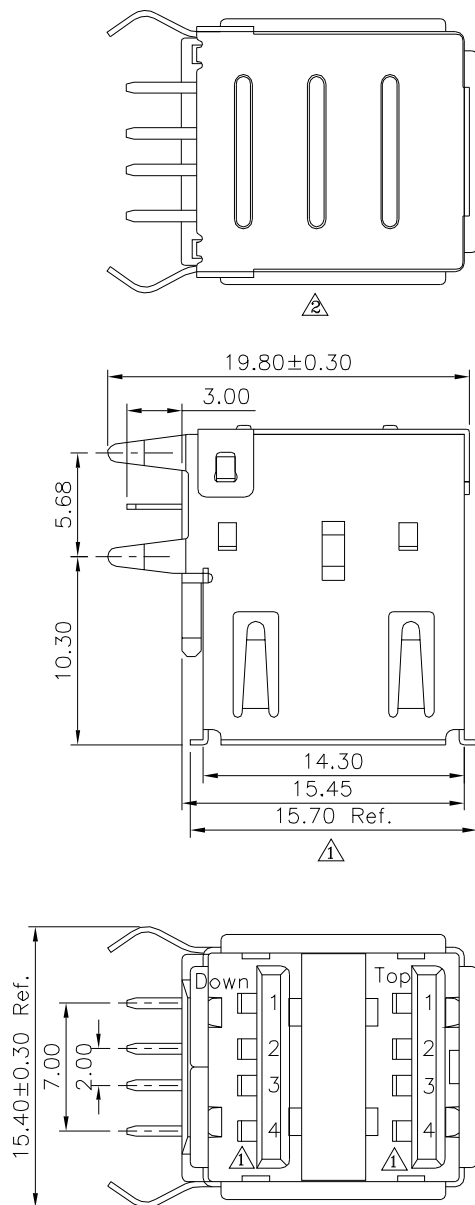

△ Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20227

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 .X* ±2*

.XX ±0.25 .XX* ±1*

.XXX ±0.13 .XXX* ±0.5*

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	09/05/2015
△A1		Modify Data	HZF	09/09/2013
△A0		NEW RELEASE	HZF	05/30/2009