

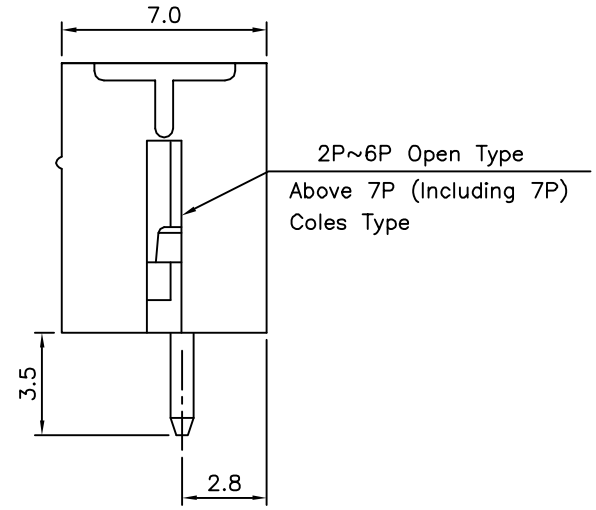


Recommended P.C.B. Layout

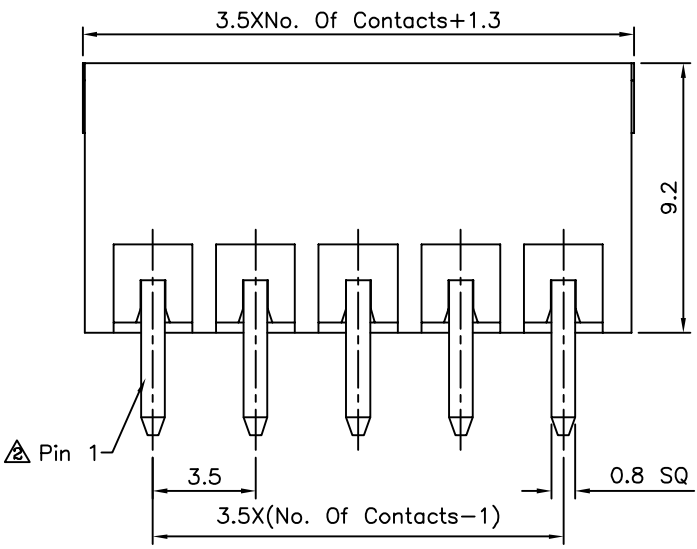

△ SPECIFICATION

Current Rating:12 Amp/Way Max.
 Voltage Rating:300V AC
 Withstanding Voltage:2500V AC For 1 Minute
 Test Time=60 Sec/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C
 5 Seconds Max.
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Gray
 Solder Pin:Copper Alloy,Tin Plated
 RoHS Compliant

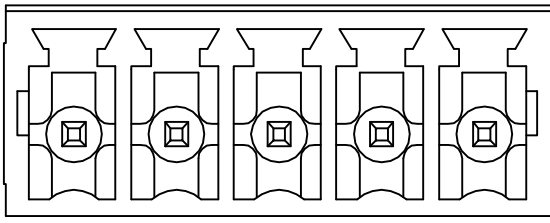

△△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°	UNIT mm	
20322		EMILY				
SCALE		CHECKED BY				
NONE		HZF		REV.		A4
DRAWING BY		GAO		NO.		REV.
REV.		A4		A4		REVISIONS
SCALE		NONE		UNIT		mm
REV.		A4		NO.		DATE

△ A4	Modify Data	HZF	05/28/2012
△ A3	Modify Data	HZF	11/23/2011
△ A2	Add Pin 1	HZF	11/22/2011
△ A1	Modify Data	HZF	10/14/2011
△ A0	NEW RELEASE	HZF	04/07/2009
NO.	REV.	CHK	DATE