
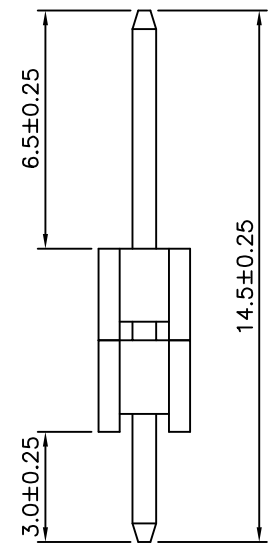
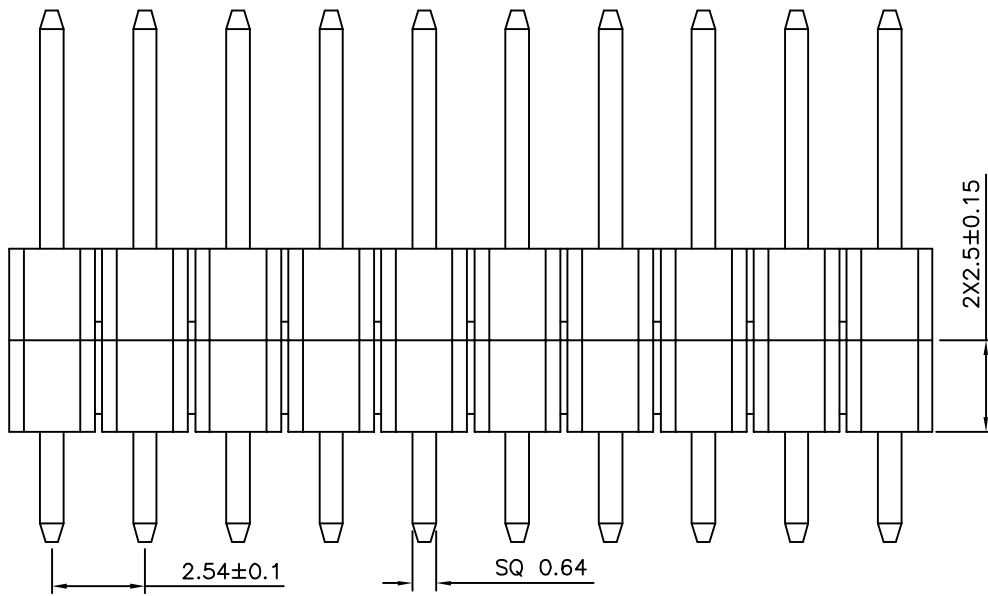
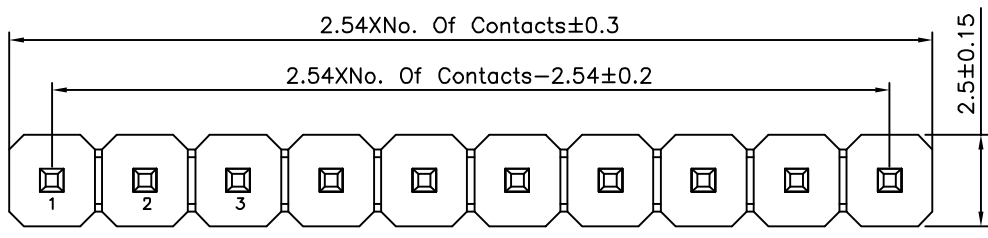


**SPECIFICATION**  
 Current Rating:3A  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Operating Temperature:-40°C~+105°C  
 Insulator:PBT(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

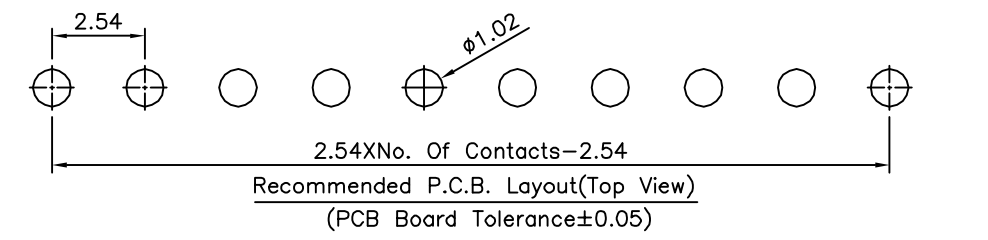

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
20684		EMILY		
		CHECKED BY HZF		
SCALE		DRAWING BY		X: ±0.25 X: ±2"
NONE		HAO		.X ±0.20 .X: ±1.5"
REV.		AO		.XX ±0.15 .XX: ±1"
REV.		AO		.XXX ±0.10 .XXX: ±0.5"
UNIT		mm		UNIT
mm		mm		mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	07/30/2014