




Recommended P.C.B. Layout


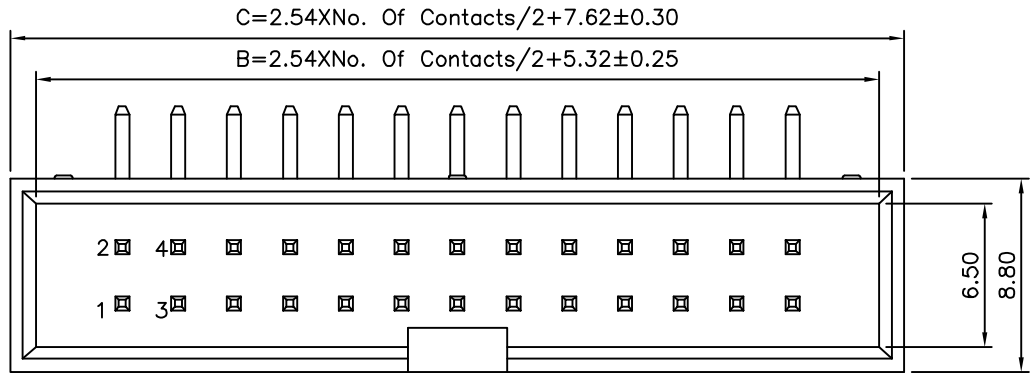


Section A-A

SPECIFICATION
 Current Rating:3 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

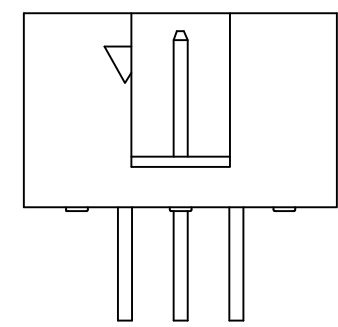

06 Pin

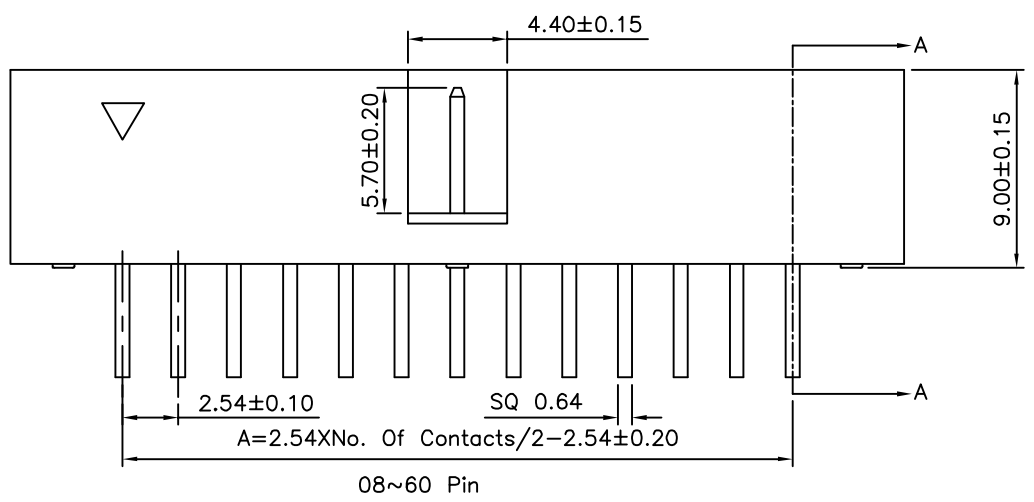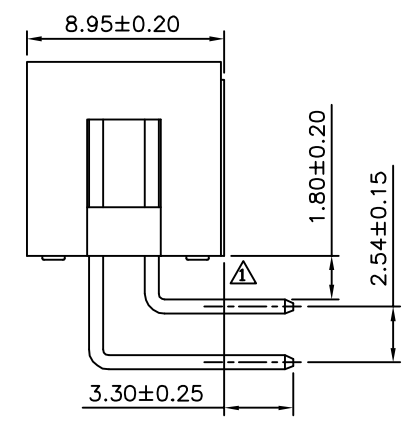

08~60 Pin

Pin	A	B	C
06	5.08	12.94	15.24
08	7.62	15.48	17.78
10	10.16	18.02	20.32
12	12.70	20.56	22.86
14	15.24	23.10	25.40
16	17.78	25.64	27.94
18	20.32	28.18	30.48
20	22.86	30.72	33.02
22	25.40	33.26	35.56
24	27.94	35.80	38.10
26	30.48	38.34	40.64
30	35.56	43.42	45.72
32	38.10	45.96	48.26
34	40.64	48.50	50.80
40	48.26	56.12	58.42
44	53.34	61.20	63.50
50	60.96	68.82	71.12
60	73.66	81.52	83.82

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20
20749		MEI		
		CHECKED BY		
		HZF		UNIT mm
		DRAWING BY		
		HAO		NO.REV.
SCALE	NONE	REV.	A1	
				CHK
				DATE

△ A1	Modify Data	HZF	12/21/2015
△ A0	NEW RELEASE	HZF	09/17/2014