


SPECIFICATION

Current Rating:2 Amp
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:30 Milliohms Max. At 100mA DC
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Δ Operation Temperature:-55°C~+125°C
 Δ Insulator:PBT+G.F.(UL94V-0)
 Contact:Phosphor Bronze
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 RoHS Compliant

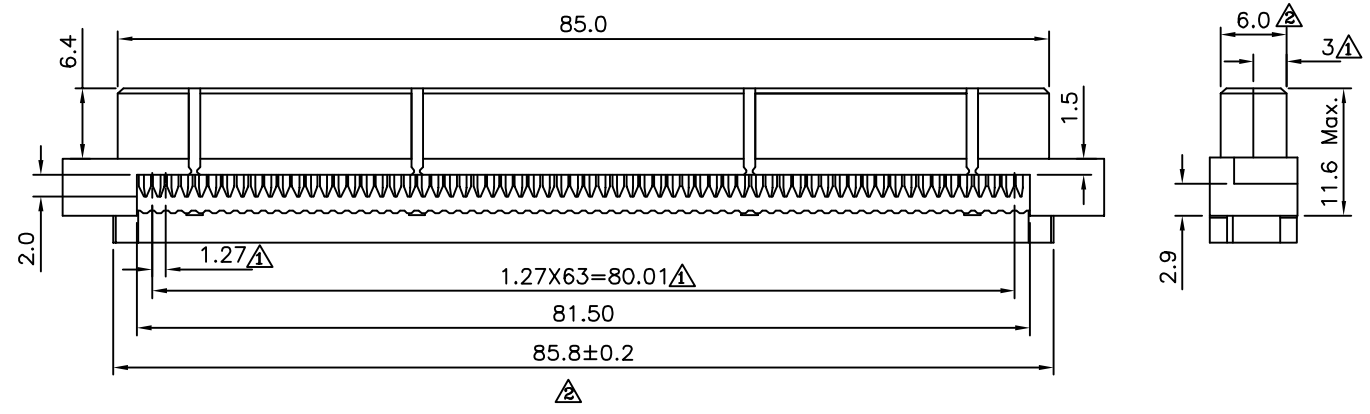

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.25 .XX ±0.15
20761		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	B2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
Δ B2		Modify Data	HZF	06/04/2015
Δ B1		Modify Data	HZF	07/31/2013
Δ B0		NEW RELEASE	HZF	11/18/2008