
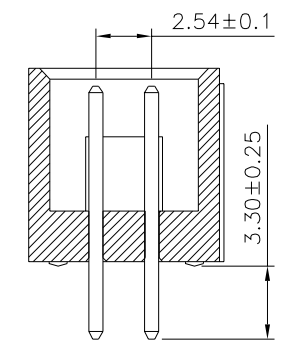
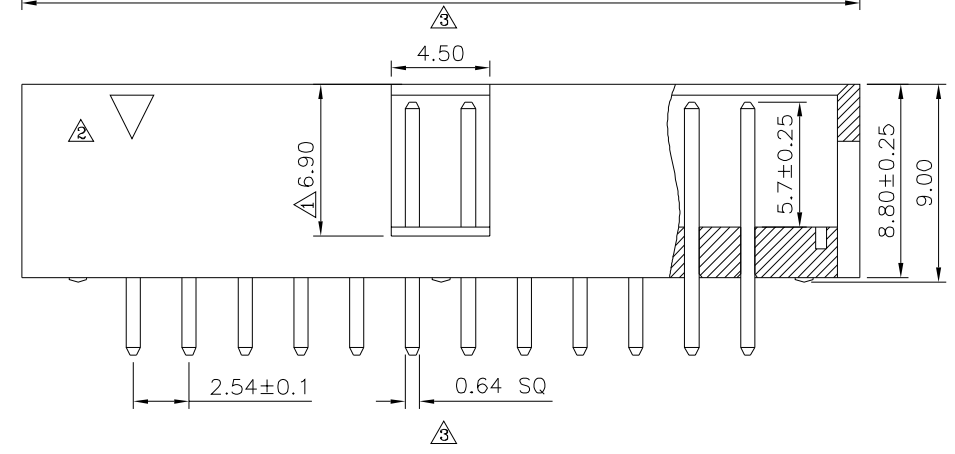
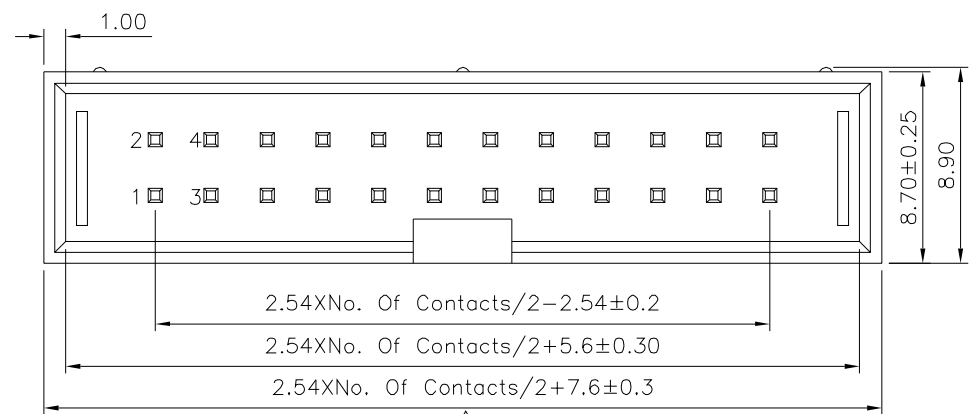


Recommended P.C.B. Layout
Tolerance: ±0.05 (Top View)

SPECIFICATION
 Current Rating: 3 Amp
 Withstand Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT(UL94V-0), Gray
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. Δ		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE Δ X: ±0.25 X*: ±2' Δ XX: ±0.20 XX*: ±1.5' Δ XXX: ±0.1 XXX*: ±0.5'
20803		EMILY		
SCALE NONE		HZF		
REV.		DRAWING BY		NO. REV.
A4		HAO		
UNIT mm				CHK
				DATE

Δ A4	Modify Data	HZF	01/10/2023
Δ A3	Modify Data	HZF	04/17/2015
Δ A2	Modify Data	HZF	11/20/2013
Δ A1	Modify Data	HZF	09/03/2013
Δ A0	NEW RELEASE	HZF	12/14/2010