


△ Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

SPECIFICATION

Current Rating:1A
 Dielectric Withstanding Voltage:500V AC RMS
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Operating Temperature:-40°C~+85°C
 Contact Resistance:30 Milliohms Max.
 Housing:PBT(UL94V-0),White
 Cover:LCP(UL94V-0)
 Contact:Brass,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Shell:SUS304,Nickel Plated Over All
 RoHS Compliant

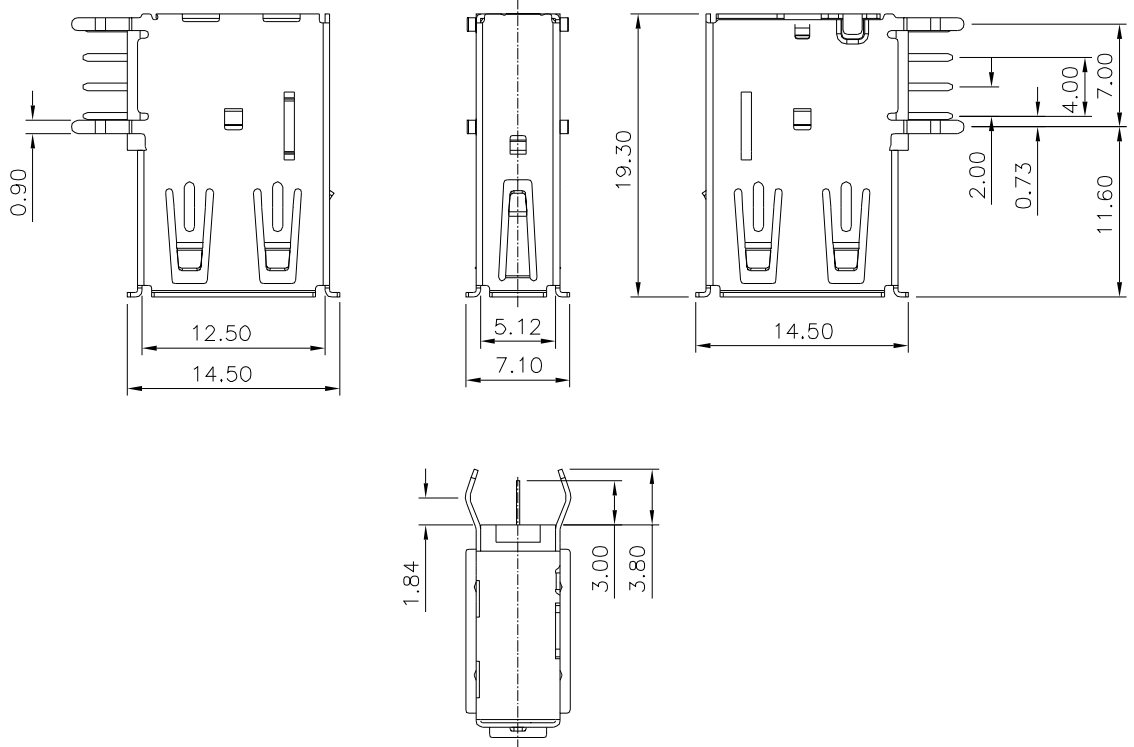

△ Contact Number	Signal Name
Pin1	VBUS
Pin2	D-
Pin3	D+
Pin4	GND

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.25 .XXX ±0.10 ANG. ±2°
20831		MEI		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	01/06/2017
△ A0		NEW RELEASE	HZF	10/20/2015