

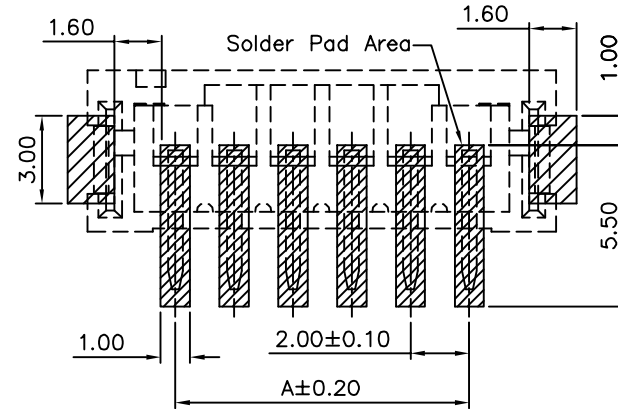
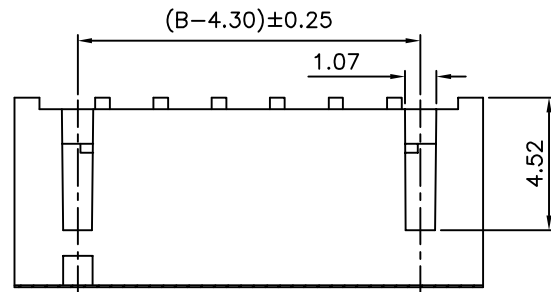



SPECIFICATION

Current Rating: 2A AC/DC
Voltage Rating: 100V AC/DC
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstanding Voltage: 800V AC/Minute
Temperature Range: -25°C~+85°C
Insulator: PA9T(UL94V-0), Nature
Pin: Brass, Tin Plated Over Nickel
Latch: Brass, Tin Plated Over Nickel
RoHS Compliant

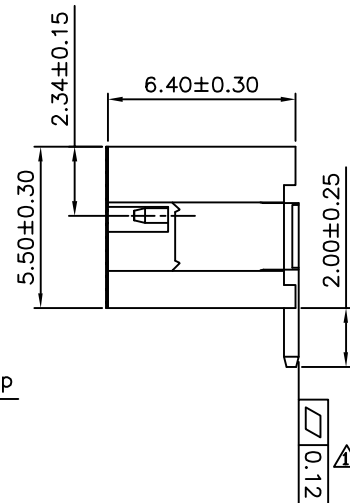

Recommended P.C.B Layout(Top Side)
P.C.B Thickness=1.20~1.60mm(Tolerance=±0.05)

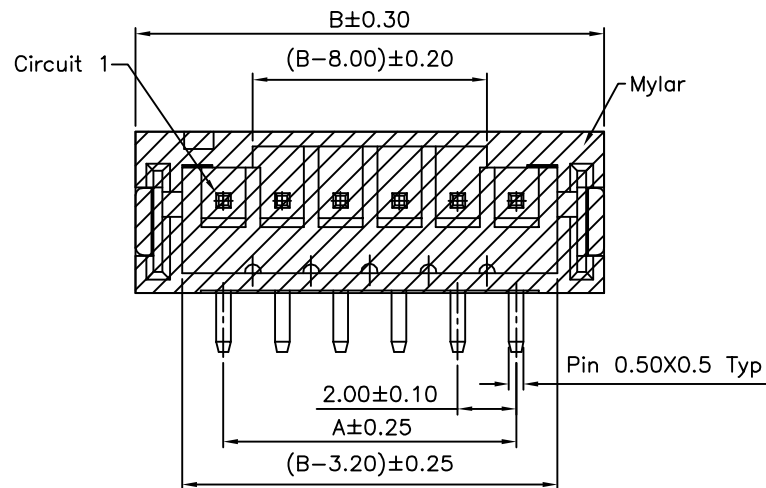

Pin	A	B	Pin	A	B
2	2.00	8.00	10	18.00	24.00
3	4.00	10.00	11	20.00	26.00
4	6.00	12.00	12	22.00	28.00
5	8.00	14.00	13	24.00	30.00
6	10.00	16.00	14	26.00	32.00
7	12.00	18.00	15	28.00	34.00
8	14.00	20.00	16	30.00	36.00
9	16.00	22.00			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20838

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.25 .X* ±2*
.XX ±0.20 .XX* ±1*
.XXX ±0.10

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	03/08/2016
A1		Modify Data	HZF	10/10/2013
A0		NEW RELEASE	HZF	05/19/2012