


SPECIFICATION
 Withstand Voltage:300V DC,10S
 Contact Resistance:1.0 Ohms Max.
 Insulation Resistance:5 Megaohms Min.
 The Cable Assembly Must 100% Test
 RoHS Compliant

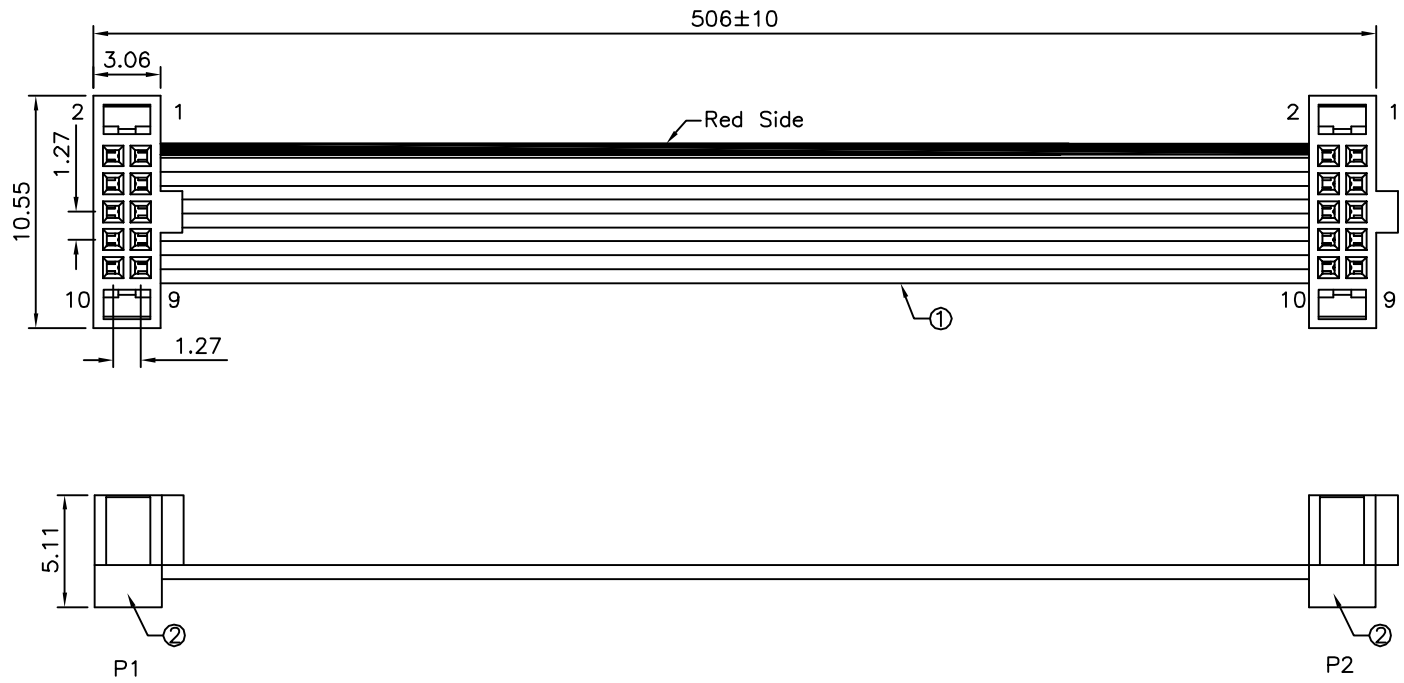

Pin Assignment	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10

No.	Name	Q'ty	Description
①	Wire	---	UL2678,PH0.635mm 10P Flat Cable,30 AWG(7/0.102TC) PVC Gray Marking Red Side
②	Connector	2 Set	P/N:20835,1.27X1.27 IDC Socket For Flat Cable 0.635mm 10P Without SR With Bump Contact:Phosphor Bronze,Selective Gold Flash Over Nickel Insulator:PBT+30%G.F.(UL94V-0),Black

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°					
20841		MEI							
		CHECKED BY							
		DRAWING BY							
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	HZF	05/11/2016
						NO.REV.	REVISIONS	CHK	DATE