

△ SPECIFICATION

Current Range:50mA 12V DC
 Dielectric Withstanding Voltage:250V AC For One Minute
 Contact Resistance:100 Milliohms Max.
 Insulation Resistance:100 Megaohms Min. At 500V DC,60s±5s
 △ Operation Temperature Range:-25°C~+70°C
 △ Storage Temperature Range:-30°C~+80°C
 RoHS Compliant

△ △



Stem Color	Operating Force
Brown(Standard)	160g
Black	100g
Red	260g
Yellow	520g
Salmon	320g

△ △





DIM. H	DIM. I
4.3(Standard)	0.5
5.0	0.6
7.0	0.6
9.5	0.6

△ △

Item	Name	Q'ty	Material	Remark
1	Cover	1	Stainless Steel	None
2	Stem	1	PA9T	UL94V-0
3	Contact	1	Phosphor Bronze	Silver Plated Over Nickel
4	Terminal	1	Brass	Silver Plated Over Nickel
5	Base	1	PA66+30%G.F.	Brown,UL94V-0

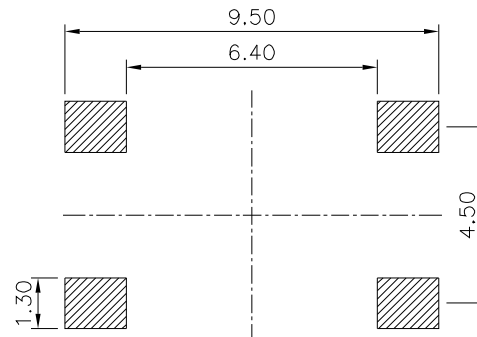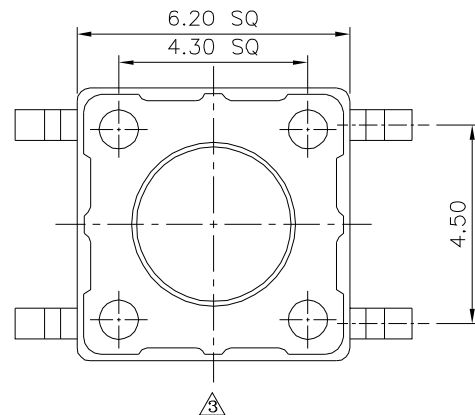

△ Recommended P.C.B. Layout

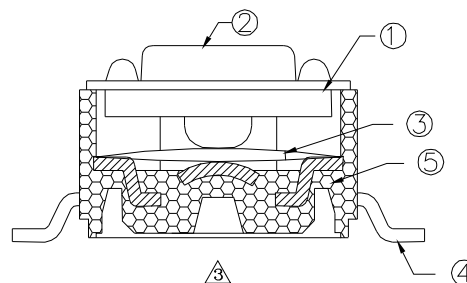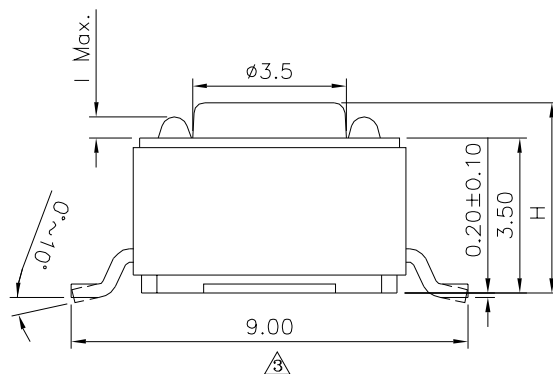

Circuit Diagram

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △ △

20847

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38 △
 .XX ±0.25
 ANG.

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	02/22/2020
△	A2	Modify Data	HZF	10/08/2018
△	A1	Modify Data	HZF	05/12/2015
△	A0	NEW RELEASE	HZF	01/28/2010