
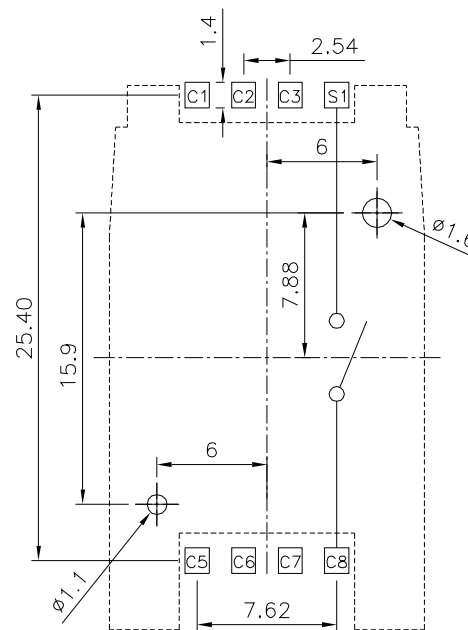


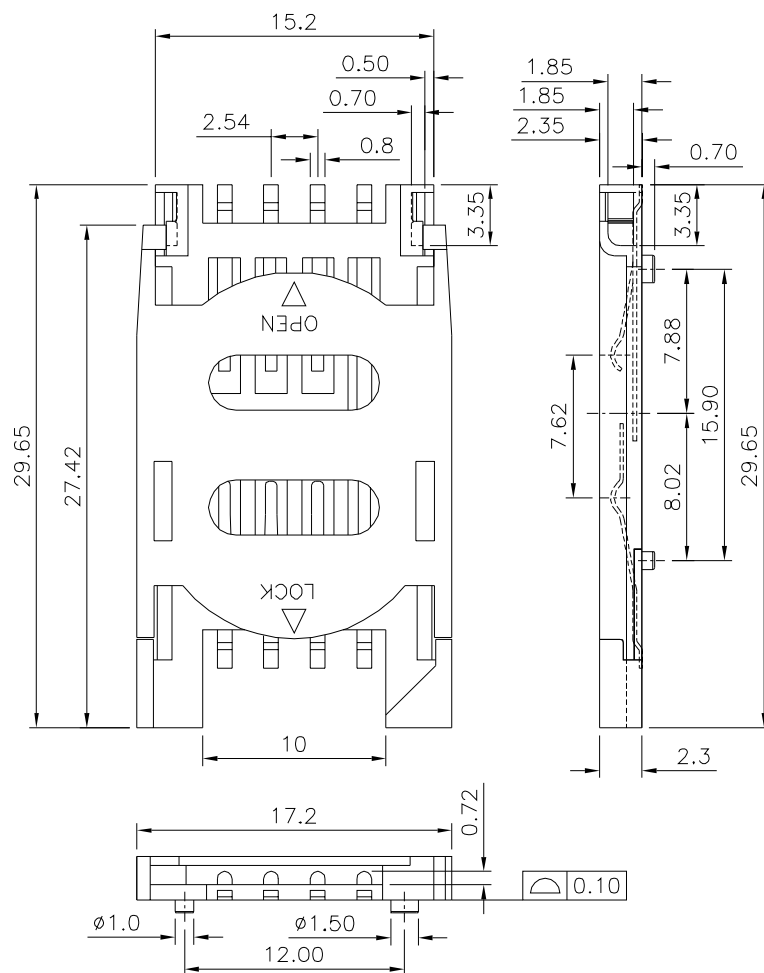

SPECIFICATION

1.General Characteristics

SIM Card 06P Hinged Cover Type
SMT 90°,With Locating Peg,With Switch,Row
Pitch=A Type,H=2.3mm,Selective Gold Flash
Tape & Reel 800 PCS/Reel

2.Material&Finish

Housing:LCP(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash On Contact
Area,Tin Plated On Solder Tails,Over Nickel

3.Electrical Characteristics

Voltage Rating:50V AC
Current Rating:1A
Contact Withstanding Voltage:500V AC For 1 Minute
Insulation Resistance:1000 Megaohms Min.

4.Mechanical Characteristics

Life Cycles:5000 Cycles

5.Environmental Characteristics

Operation Range:-40°C~+85°C

6.RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20979

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.15 X.* ±2°

.XX ±0.10 .X.* ±1°

.XXX ±0.05

UNIT

mm



△ A0
NO. REV.

NEW RELEASE
REVISIONS

HZF
CHK

08/09/2016
DATE