

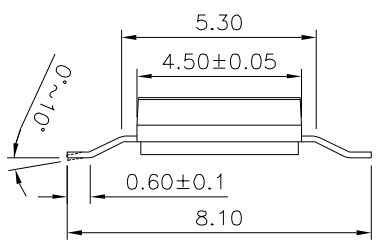
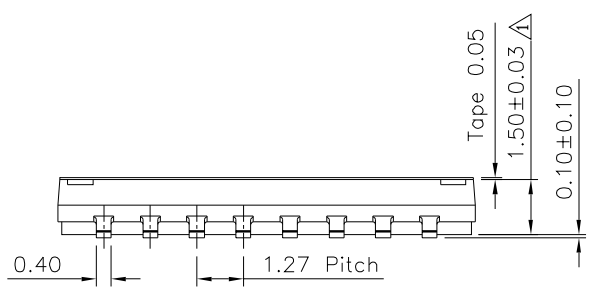


△ SPECIFICATION
 Current Range:
 Non-Switching:100mA 50V DC
 Switching:25mA 24V DC
 Dielectric Withstanding Voltage:300V AC For One Minute
 Contact Resistance:100 Milliohms Max.(Initial)
 Insulation Resistance:100 Megaohms Min.
 At 500V DC,60s±5s
 Operation Temperature Range:-40°C~+85°C
 Storage Temperature Range:-40°C~+85°C
 Capacitance:5pF Max. At 1 MHz±10 KHz
 RoHS Compliant

△ Recommended P.C.B. Layout



Pin	A
02	3.77
04	6.31
06	8.85
08	11.39
10	13.93

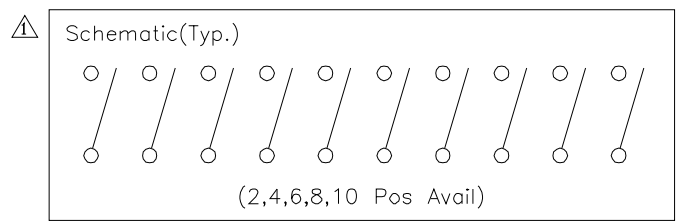

Item	Description	Q'ty	Material	Remark
①	Cover	1	HTN,UL94V-0	Black
②	Actuator		LCP,UL94V-0	White
③	Contact		Phosphor Bronze	Gold Plated Over Nickel
④	Terminal		Brass	Gold Plated Over Nickel
⑤	Base	1	HTN,UL94V-0	Black
⑥	Tape		Katpon	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.2 .XX ±0.2 ANG.	△ A4	Modify Data	HZF	10/26/2018
21201		MEI			△ A3	Modify Data	HZF	07/02/2014
		CHECKED BY			△ A2	Modify Data	HZF	02/27/2014
		HZF		△ A1	Modify Data	HZF	11/19/2009	
		DRAWING BY		△ A0	NEW RELEASE	HZF	02/07/2009	
		CYP		NO.REV.	REVISIONS	CHK	DATE	
SCALE	NONE	REV.	A4	UNIT	mm			