




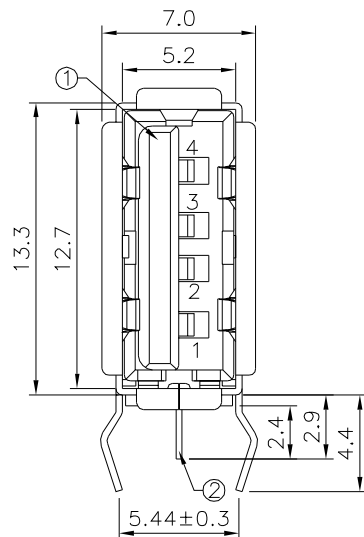

1

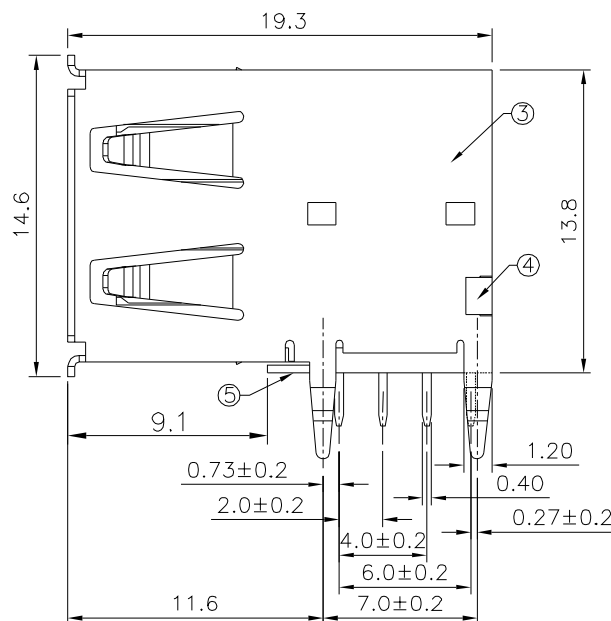

1

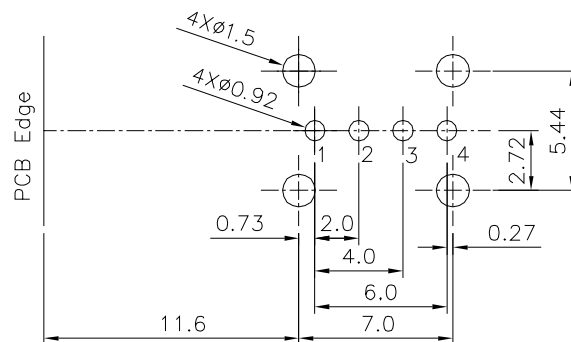

1 Recommended P.C.B. Layout(Bottom View)

1 SPECIFICATION

Rated Voltage And Current:1.5A At 250V AC Min.
Dielectric Withstanding Voltage:
750V AC RMS For 1 Minute(Rev. 1.1)
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 500V DC
Durability (Life Test):1500 Cycles
RoHS Compliant

1	No.	Description	Q'ty	Material	Remark
	1	Housing	1	PBT+G.F.	21273:White 21283:Black
	2	Terminal	4	Phosphor Bronze	Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel
	3	Shell	1	Brass	Nickel Plated
	4	Rear Shell	1	SPCC	Nickel Plated
	5	Bottom Cover	1	PBT+G.F.	

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21273

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

1 X. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
1				
2	A2	Modify Data	HZF	03/15/2018
3	A1	Modify Data	HZF	03/09/2018
4	A0	NEW RELEASE		