

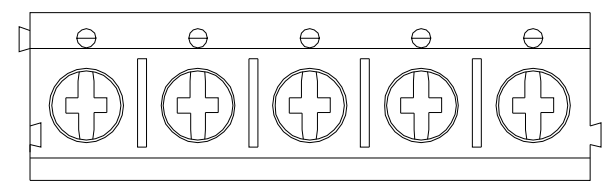


Recommended P.C.B. Layout

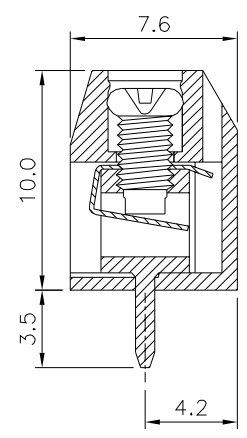

△

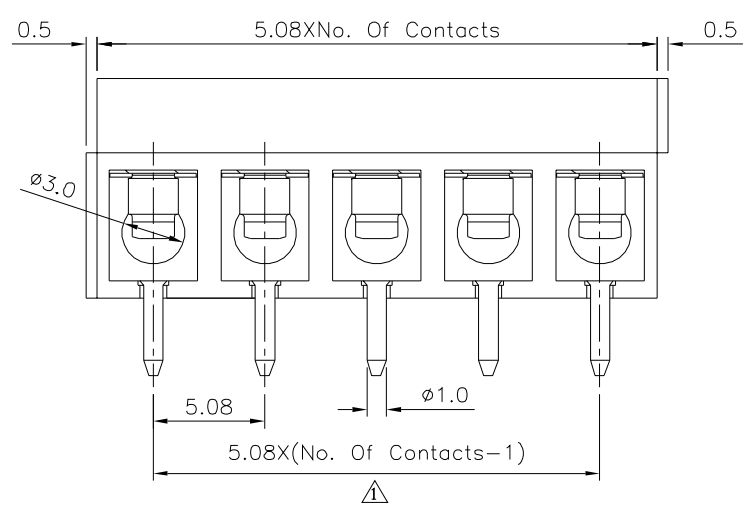

**SPECIFICATION**

Current Rating:15 Amp/Way Max.  
 Voltage Rating:250V AC  
 Withstanding Voltage:2500V AC/Minute  
 Test Time=60 Seconds/PCS  
 Contact Resistance:20 Milliohms Max.  
 Wire Range:14~24 AWG  
 Torque:4.0 Kgf.cm/M2.5  
 Operation Temperature:-40°C~+105°C  
 Soldering Reliability:Test Temperature=250°C±10°C  
 5 Seconds Max.  
 Contact:Copper Alloy,Tin Plated  
 Screw:Steel,Galvanized With Cr3+ Plated  
 Wire Guard:Stainless Steel  
 Insulator Body(Housing):Polyamide(UL94V-0),Blue  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 21318

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY CYP

SCALE NONE

REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	08/12/2015
△2	A2	Modify Data	HZF	05/23/2015
△1	A1	Modify Data	HZF	09/18/2012
△0	A0	NEW RELEASE	HZF	02/27/2012