

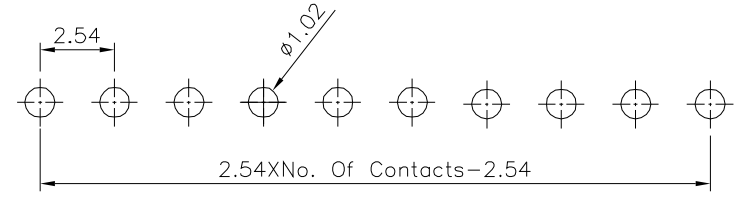



SPECIFICATION
 Current Rating:3 Amp
 Withstanding Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

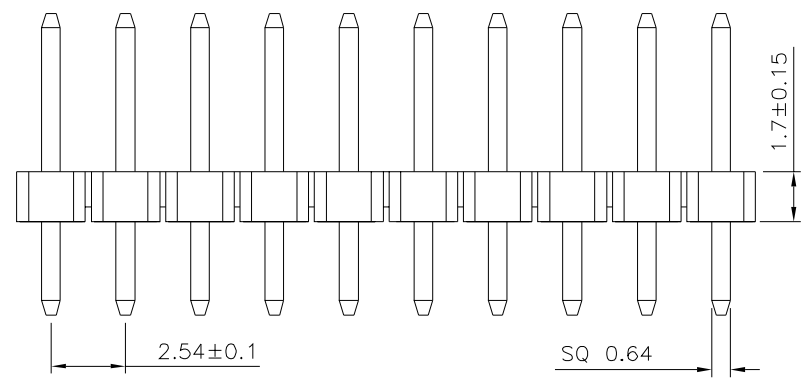

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance ± 0.05)

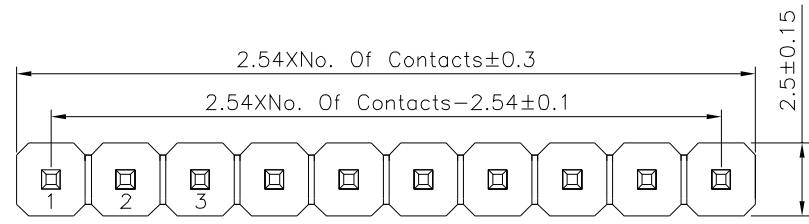

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE >80 ± 1.20 25~80 ± 0.15 5~25 ± 0.10 <5 ± 0.05 ANG. $\pm 0.03^\circ$
21360		MEI		
		CHECKED BY	HZF	
SCALE		DRAWING BY		UNIT
NONE	REV.	A0	CYP	mm

NO.	REV.	REVISIONS	CHK	DATE
△	A0	NEW RELEASE	HZF	12/28/2017