



**△ SPECIFICATION**  
 Current Rating:1.5 Amp  
 Voltage Rating:125V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Dielectric Strength:1000V AC Or 1500V DC RMS  
 At 0.5mA 50Hz/60Hz 1 Minute  
 Operation Temperature Range:-40°C~+85°C  
 Storage Temperature:-40°C~+85°C  
 Relative Humidity:<80%  
 Mating/Unmating Force:30N Max.  
 Retention Strength:50N For 60S±5S  
 Operating Life:750 Cycles Min.  
**△** Housing&Insert:PBT(UL94V-0),Black  
 Contact:Phosphor Bronze,∅0.46mm  
 Gold Flash Over All,Over Nickel  
 Mates With Modular Plug Conforming  
 To FCC Part 68,Subpart F  
 RoHS Compliant

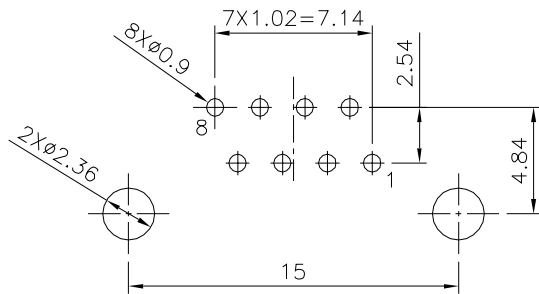

**△ Recommended P.C.B. Layout**  
 (PCB Board Tolerance±0.05)

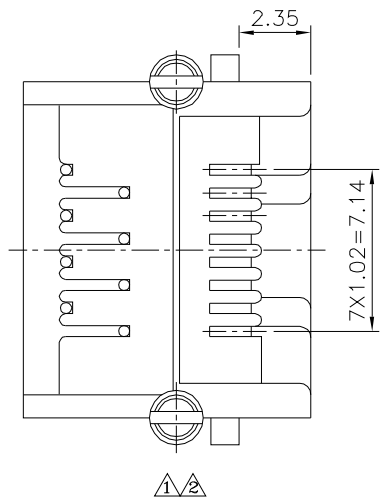

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 0~15 ±0.15 △ 15~30 ±0.20 30~ ±0.25 ANG. ±1°					
21426		MEI			△ A3	Modify Data	HZF	04/07/2017	
		CHECKED BY	HZF		△ A2	Modify Data	HZF	05/08/2014	
		DRAWING BY	CYP	△ A1	Modify Data	HZF	11/02/2011		
SCALE	NONE	REV.	A3	UNIT	mm	△ A0	NEW RELEASE	HZF	12/14/2007
				NO. REV.	REVISIONS	CHK	DATE		