


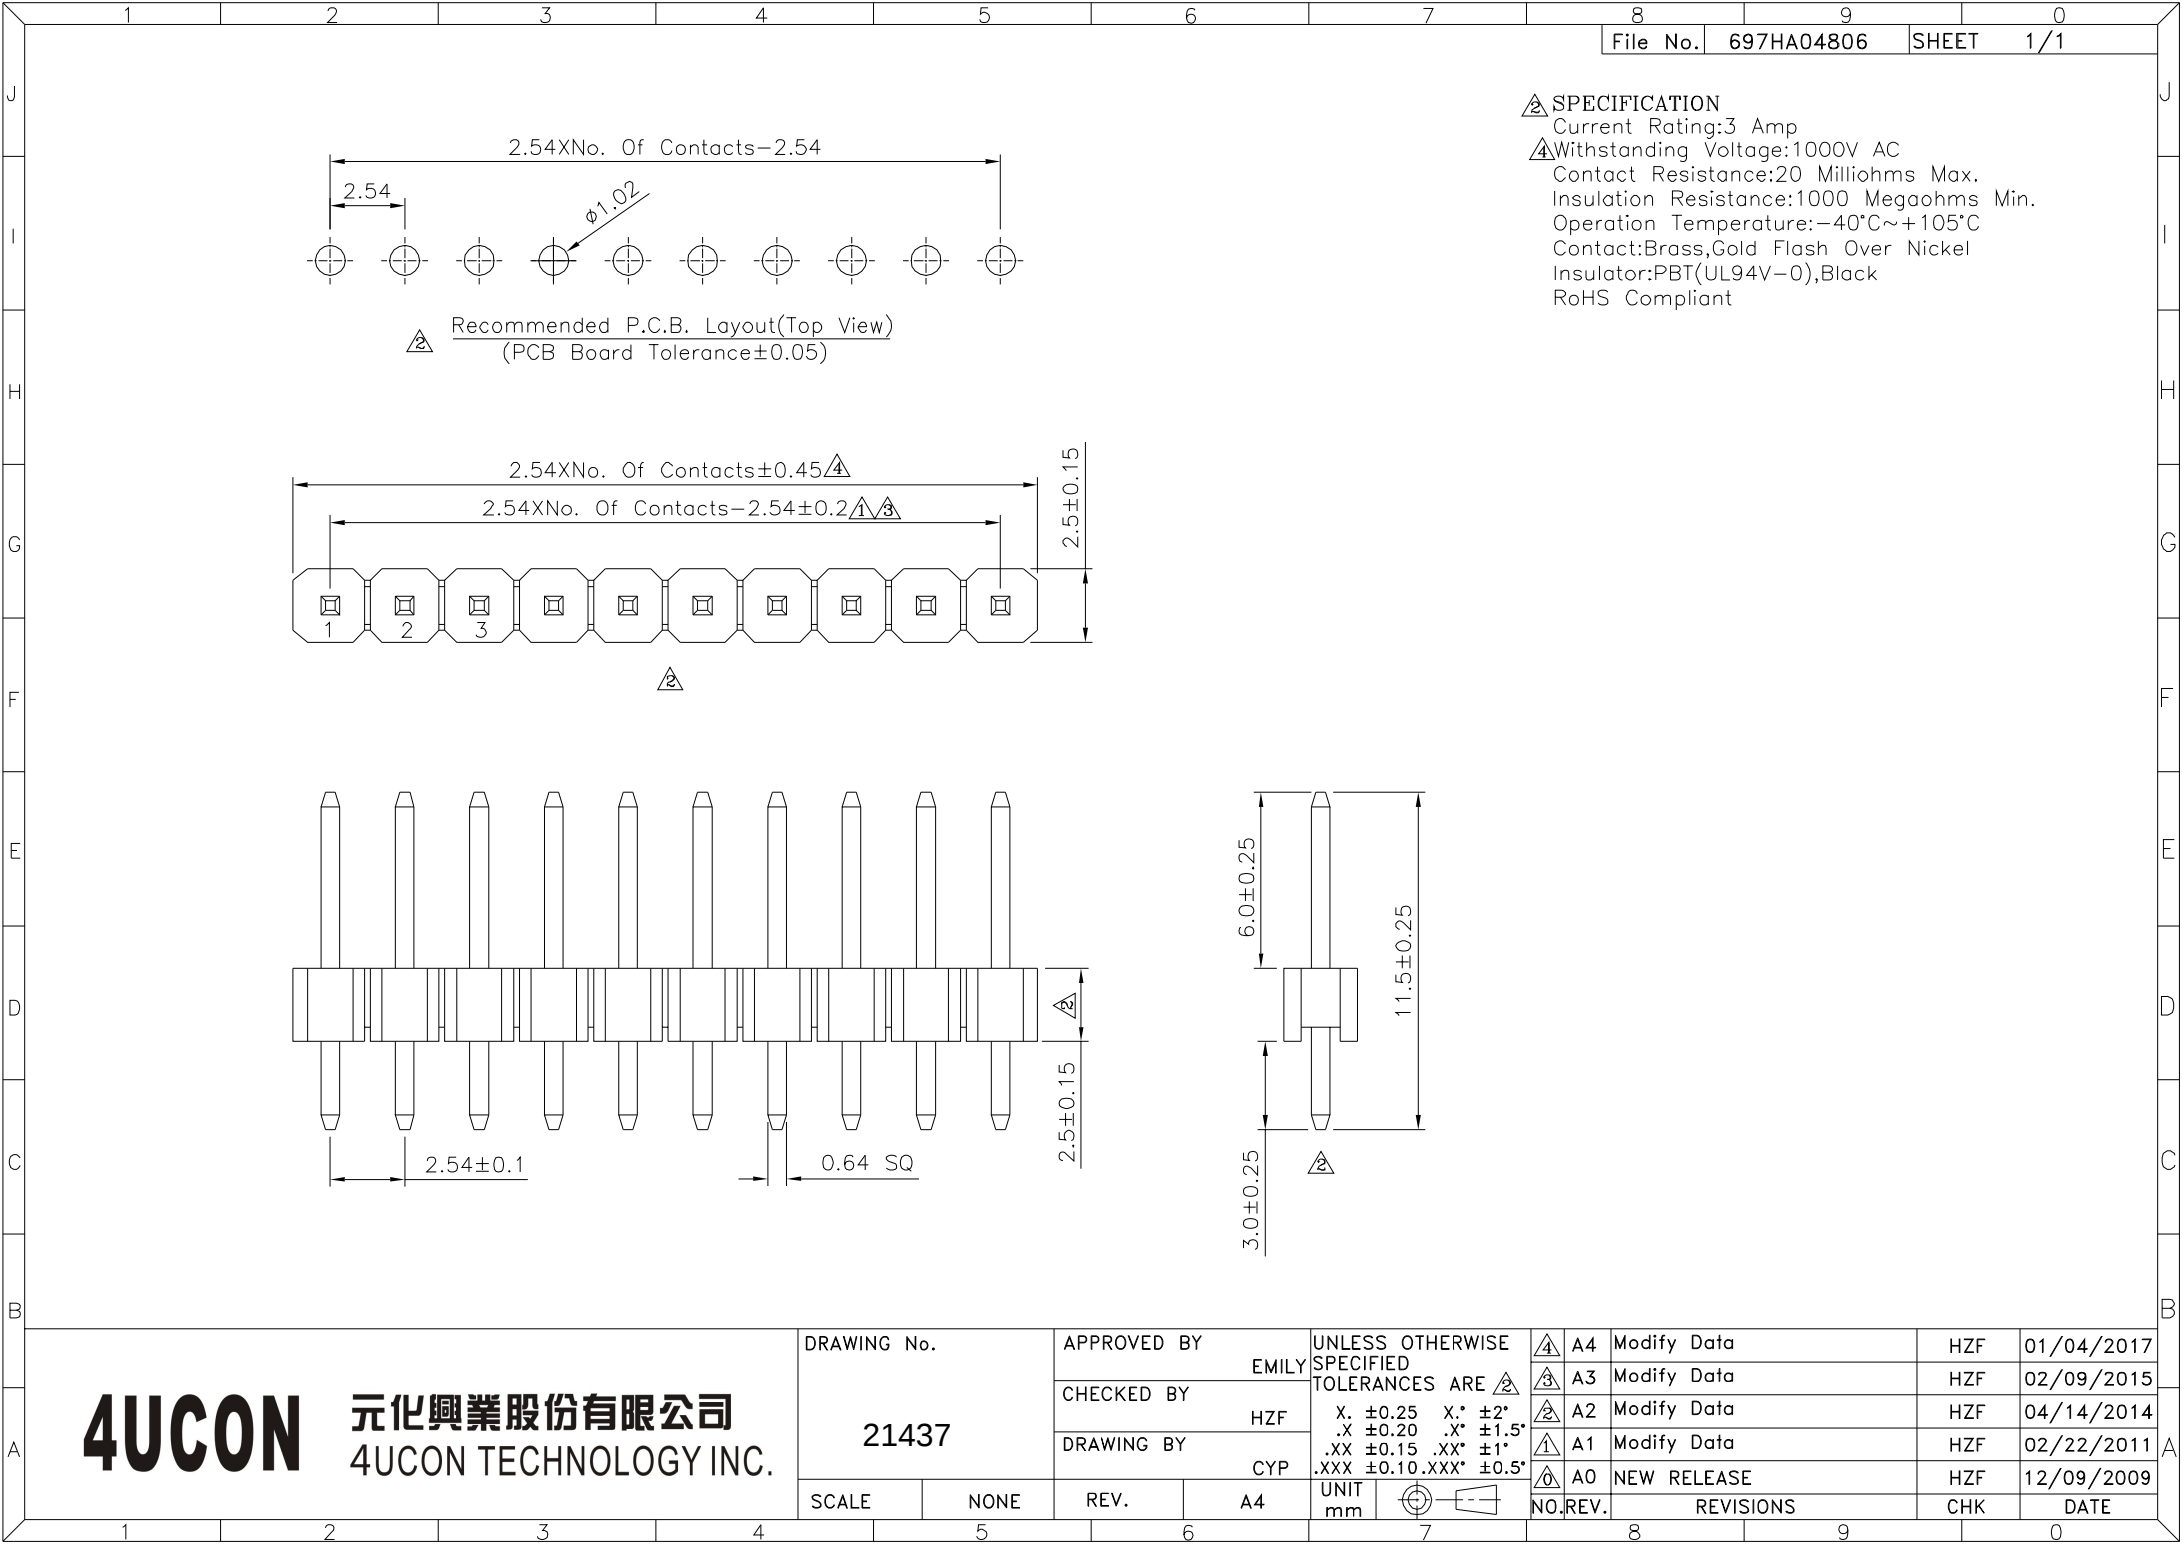

SPECIFICATION
Current Rating: 3 Amp
Withstanding Voltage: 1000V AC
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact: Brass, Gold Flash Over Nickel
Insulator: PBT (UL94V-0), Black
RoHS Compliant

Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ± 0.05)


4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.
21437

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
CYP

SCALE NONE REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ± 0.25 X.* $\pm 2^{\circ}$
.X ± 0.20 .X* $\pm 1.5^{\circ}$
.XX ± 0.15 .XX* $\pm 1^{\circ}$
.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$
UNIT mm



4	A4	Modify Data	HZF	01/04/2017
3	A3	Modify Data	HZF	02/09/2015
2	A2	Modify Data	HZF	04/14/2014
1	A1	Modify Data	HZF	02/22/2011
0	A0	NEW RELEASE	HZF	12/09/2009
NO. REV.	REVISIONS		CHK	DATE