


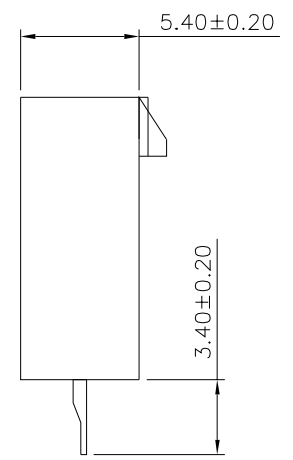



**SPECIFICATION**  
 Current Rating:7A AC,DC  
 Voltage Rating:600V AC,DC  
 Withstanding Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megohms Min.  
 Contact Resistance:10 Milliohms Max.  
 Operation Temperature:-25°C~+85°C  
 Insulator:PA66,UL94V-2,Nature Color  
 Contact:Brass,Tin Plated Over Nickel  
 RoHS Compliant

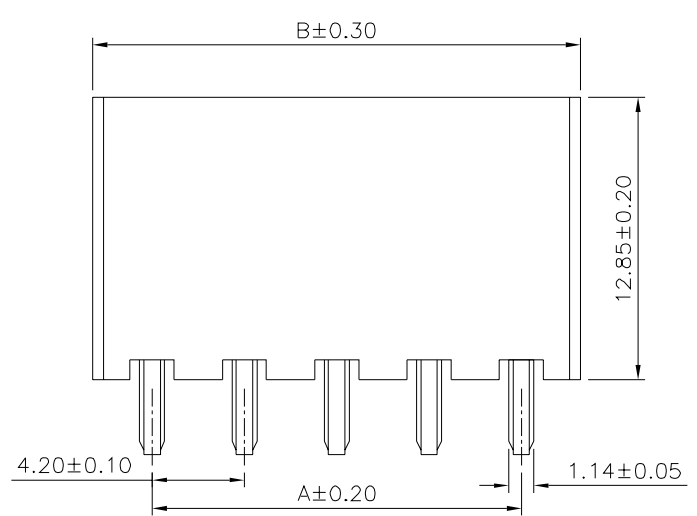


Recommended P.C.B. Layout

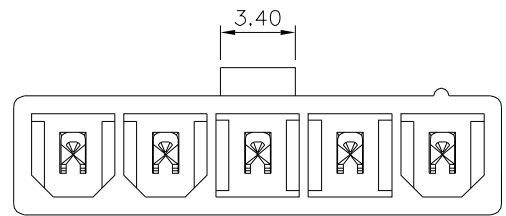


2P




3P

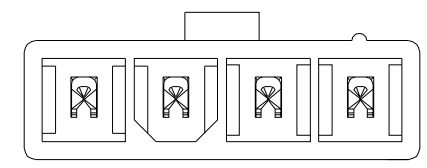

4P

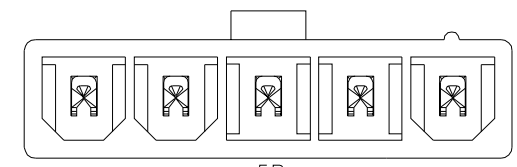

5P

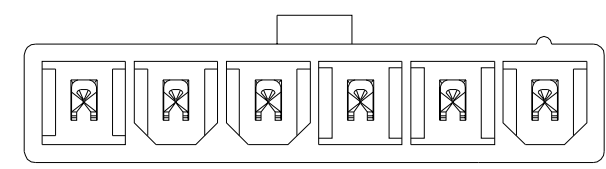

6P

Pin	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
21442		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	08/03/2014
		REVISIONS		