

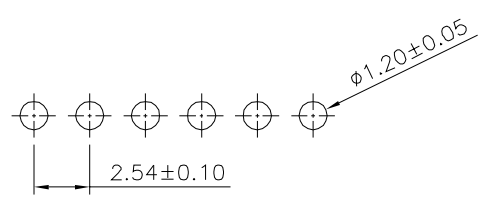
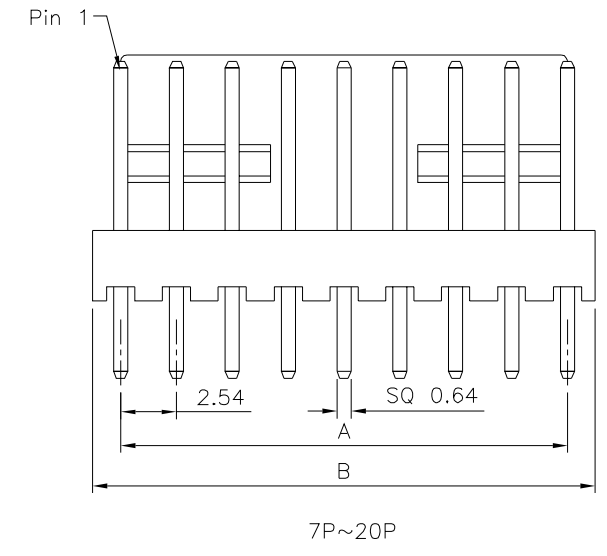


**SPECIFICATION**  
 Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Withstanding Voltage:1000V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Contact:Brass,Tin Plated  
 Insulator:PA66,UL94V-2,Beige Color  
 RoHS Compliant

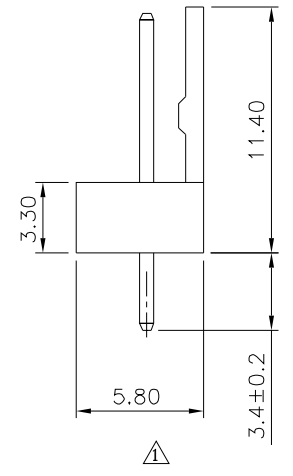

Recommended P.C.B. Layout

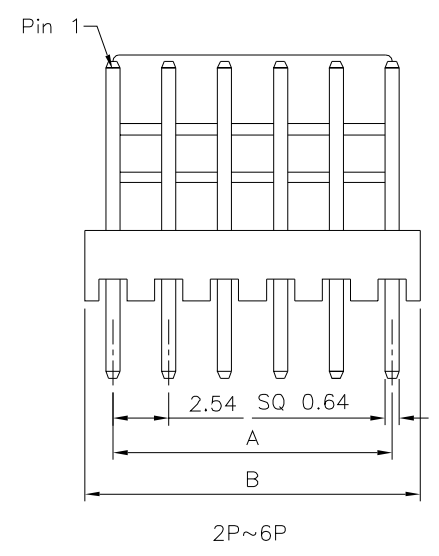

Pin	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.   
 21447

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.50  
 .XX ±0.25  
 .XXX ±0.10  
 ANG. ±2°

NO.	REV.	REVISIONS	CHK	DATE
	B3	Modify Data	HZF	02/25/2022
	B2	Modify Data	HZF	08/14/2021
	B1	Modify Data	HZF	04/22/2020
	B0	NEW RELEASE	HZF	01/05/2015

SCALE NONE REV. B3 UNIT mm