File No.	696IK23805	SHEET	1/1

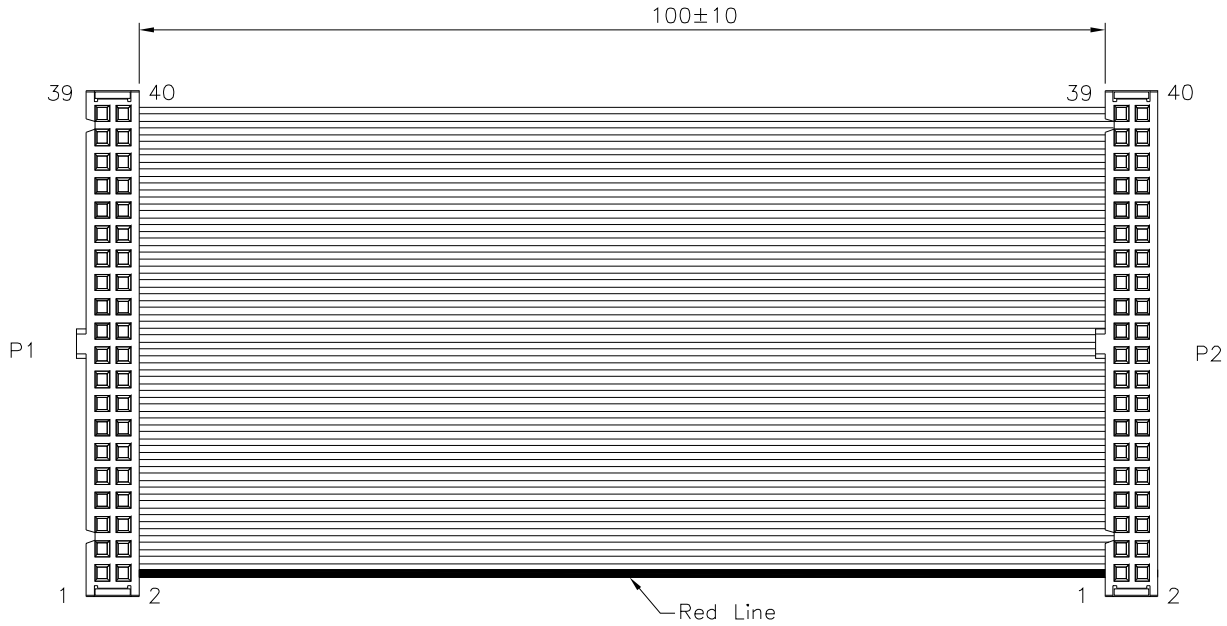

SPECIFICATION

Contact Resistance:5 Ohms Max.
Insulation Resistance:20 Megaohms Min.
100% Open/Short Test
DC Test 300V/10ms
RoHS Compliant

Pin Assignment

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
⋮	⋮
35	35
36	36
37	37
38	38
39	39
40	40

No.	Name	Q'ty	Description
①	Wire	---	UL2651 28AWG,PH1.27mm 40P Gray Flat Cable With Red Side
②	Connector	2 PCS	PH2.54 IDC Socket Without SR,40Pin,Black

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
21494	CHECKED BY HZF	.X ±0.5
	DRAWING BY CYP	ANG. ±0.5°
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	11/23/2018