

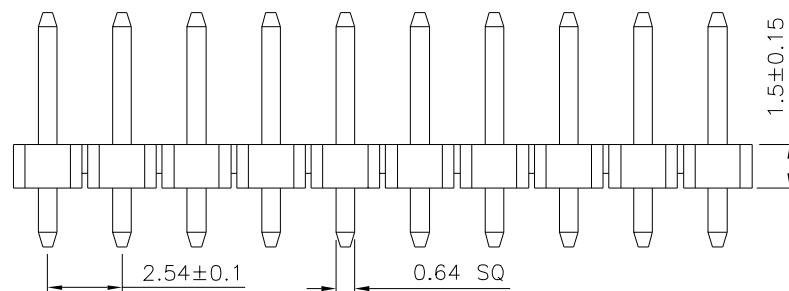


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

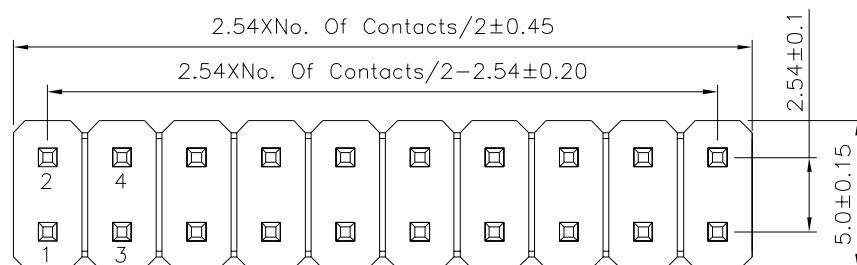

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21583

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY	
------------	--

HZF

DRAWING BY

CYP

REV.	
------	--

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X. ± 0.25	X.* $\pm 2^\circ$
.X ± 0.20	.X.* $\pm 1.5^\circ$
.XX ± 0.15	.XX.* $\pm 1^\circ$
.XXX ± 0.10	.XXX.* $\pm 0.5^\circ$
UNIT mm	

 $\triangle 0$

5	A0
---	----

0	NEW RELEASE
---	-------------

REVISIONS

HZF

04/01/2019

CHK

	DATE
--	------