
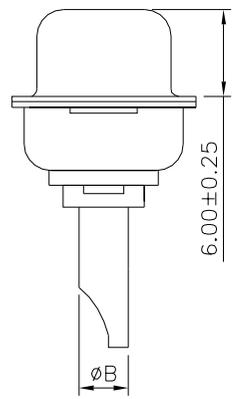
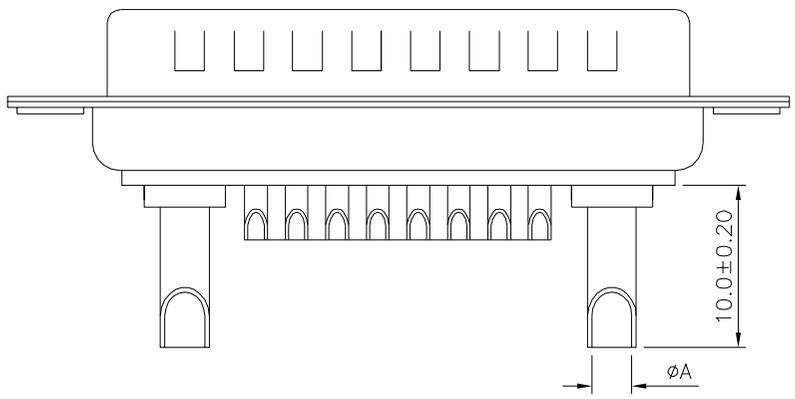


**SPECIFICATION**

Signal Contact Current Rating:5 Amp  
 Power Contact Current Rating:10,20,30,Or 40 Amps  
 Dielectric Withstanding Voltage:1000V AC Per Minute  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+125°C  
 Insulator:PBT+30%G.F.(UL94V-0)  
 Signal Contact:Brass,Gold Flash Over Nickel  
 Power Contact:Brass,Gold Flash Over Nickel  
 Metal Shell:Steel,Tin Plated  
 RoHS Compliant

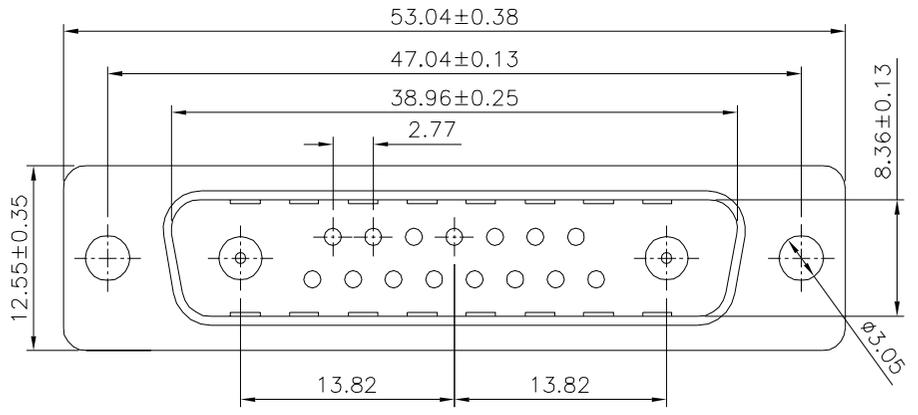

Current Rating	Wire Size	ØA	ØB
20 Amps	AWG #12~14	2.7	3.6

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.30 ANG. ±2°
21675		MEI		
		CHECKED BY		
HZF		DRAWING BY		
CYP		A0		UNIT
SCALE	NONE	REV.	A0	mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	11/23/2015
		REVISIONS		