
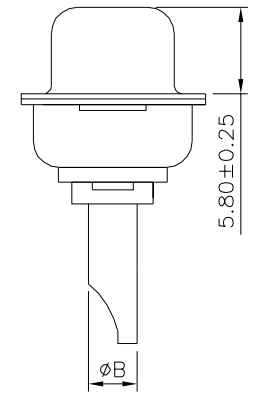
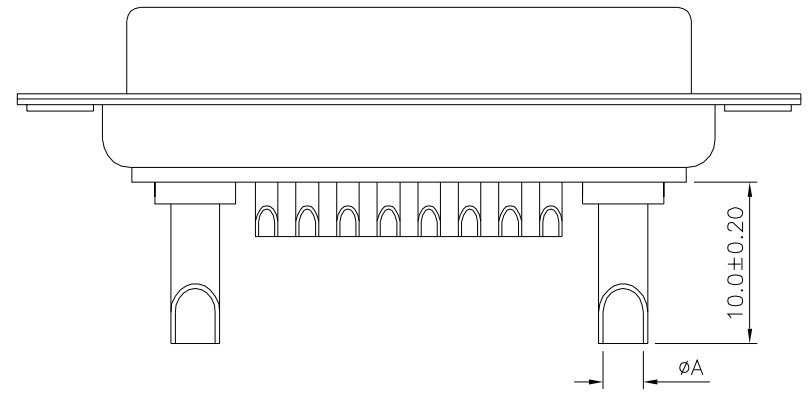


SPECIFICATION

Signal Contact Current Rating:5 Amp
 Power Contact Current Rating:10,20,30,Or 40 Amps
 Dielectric Withstanding Voltage:1000V AC Per Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+125°C
 Insulator:PBT+30%G.F.(UL94V-0)
 Signal Contact:Brass,Gold Flash Over Nickel
 Power Contact:Brass,Gold Flash Over Nickel
 Metal Shell:Steel,Tin Plated
 RoHS Compliant

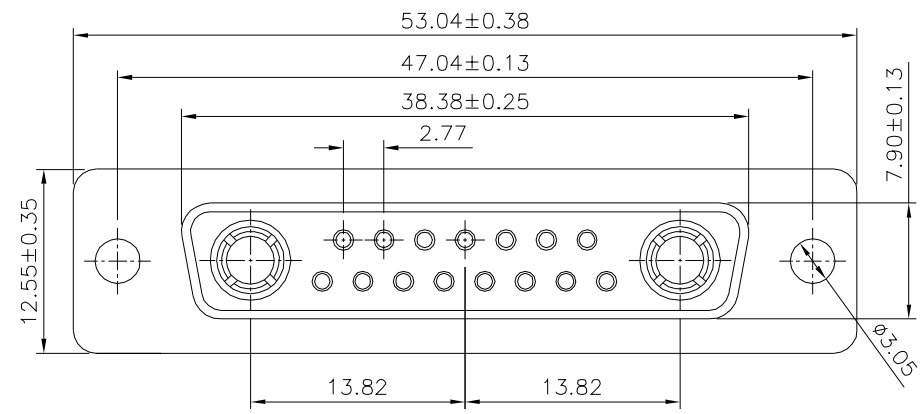

| Current Rating | Wire Size | φA | φB |
|----------------|------------|-----|-----|
| 20 Amps | AWG #12~14 | 2.7 | 3.6 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|----------------|------|----------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.30 ANG. ±2° |
| 21676 | | MEI | | |
| | | CHECKED BY HZF | | |
| DRAWING BY CYP | | UNIT mm | | |
| SCALE | NONE | REV. | A0 | |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | DESCRIPTION | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 11/23/2015 |
| | | REVISIONS | | |