

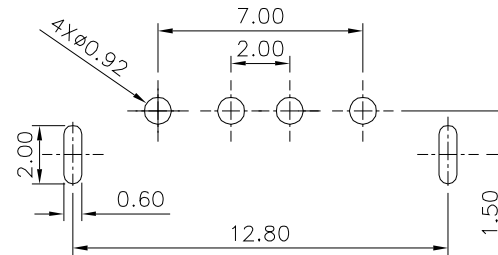
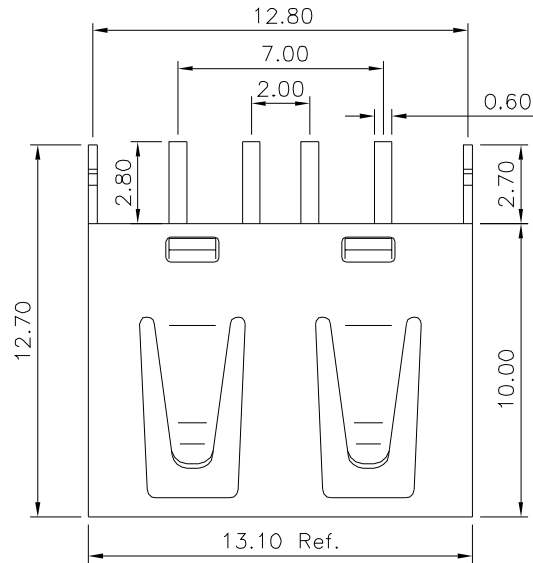


SPECIFICATION

Current:1.5A Max.
Voltage:30V Max.
Withstanding Voltage:500V AC
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+75°C
Mating Force:35N Max.
Withdrawal Force:7N Min.
Durability:1500 Cycles Min.
Insulator:PBT+30%G.F.(UL94V-0),Black
Contact:C2680,Gold Flash On Contact Area,Tin
Plated On Solder Tails,Over Nickel
Shell:C2680,Nickel Plated Over All
RoHS Compliant

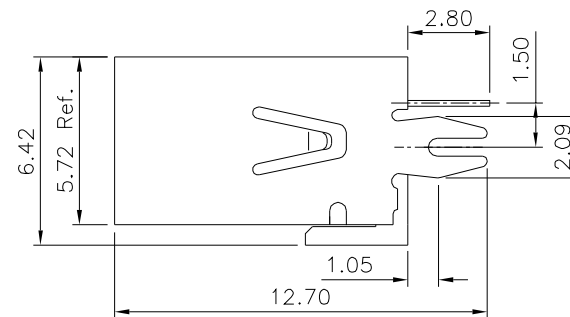

Recommended P.C.B. Layout

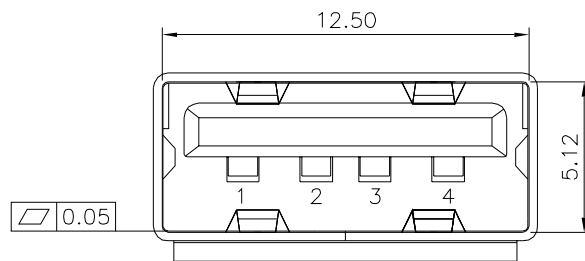

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21752

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 .X* ±2*
.XX ±0.25 .XX* ±1*
.XXX ±0.13 .XXX* ±0.5*

SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

AO

NEW RELEASE

REVISIONS

CHK

DATE