


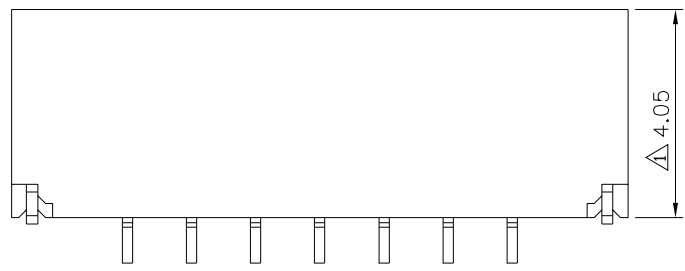


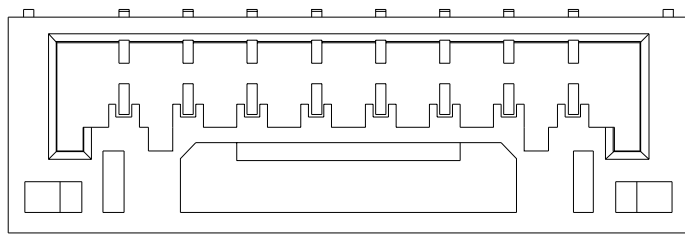

△ SPECIFICATION
 Current Rating:1A AC,DC
 Voltage Rating:50V AC,DC
 Withstand Voltage:500V AC/Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Operation Temperature:-25°C~+85°C
 Contact:Phosphor Bronze,Tin Plated
 Insulator:PA6T(UL94V-0),Beige
 RoHS Compliant

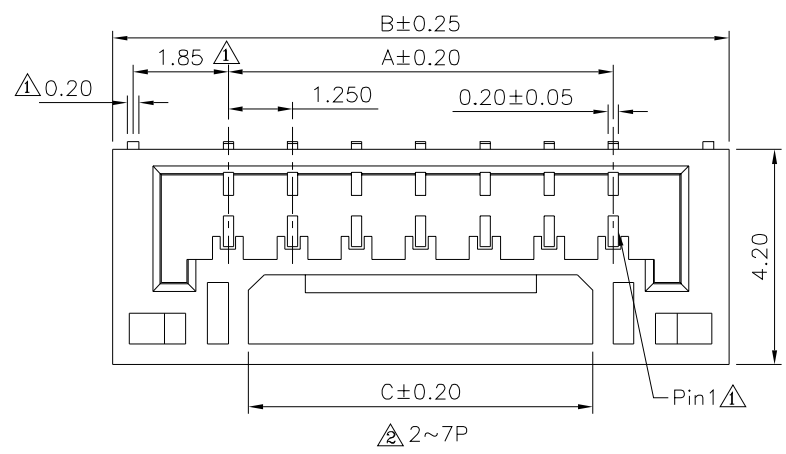

△ Pin	A	B	C
02	1.25	5.75	2.20
03	2.50	7.00	3.30
04	3.75	8.25	4.55
05	5.00	9.50	4.55
06	6.25	10.75	6.55
07	7.50	12.00	6.55
08	8.75	13.25	6.55
09	10.00	14.50	6.55
10	11.25	15.75	8.55
11	12.50	17.00	8.55
12	13.75	18.25	8.55

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±1°
21775		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	12/03/2019
△ A1		Modify Data	HZF	09/22/2017
△ A0		NEW RELEASE	HZF	02/20/2014