File No.	697GC17806	SHEET	1/1

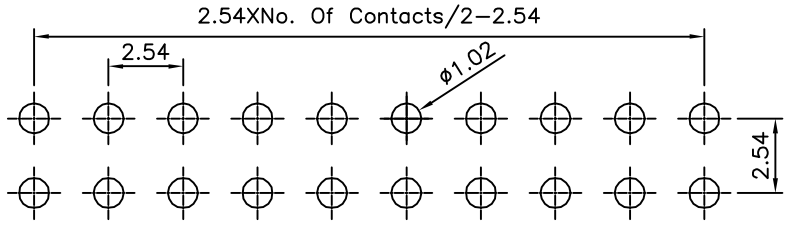

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

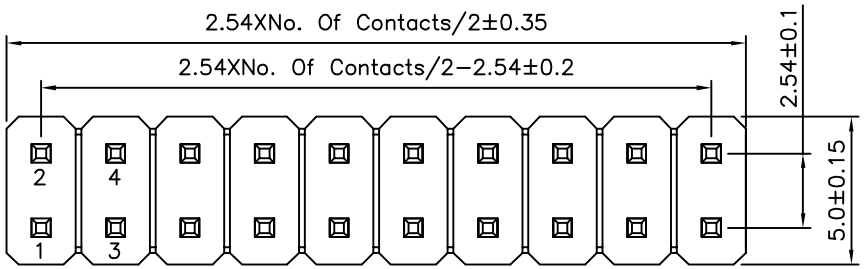

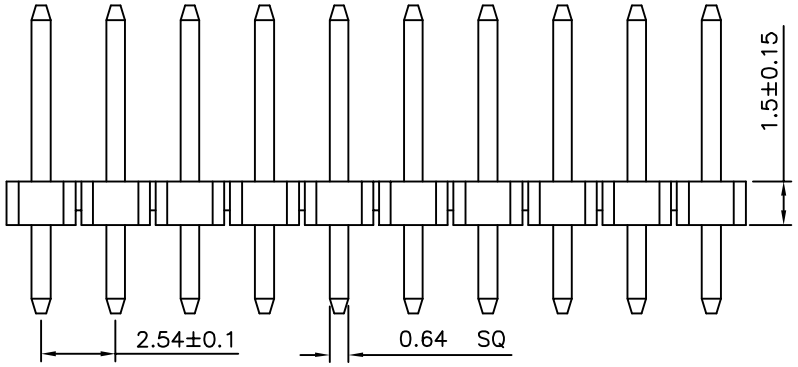



SPECIFICATION
Current Rating:3 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
21810	MEI	X. ±0.25	X.° ±2°		
	CHECKED BY HZF	.X ±0.20	.X° ±1.5°		
	DRAWING BY CYP	.XX ±0.15	.XX° ±1°		
		.XXX ±0.10	.XXX° ±0.5°		
SCALE NONE	REV. A0	UNIT mm			

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	09/17/2015