

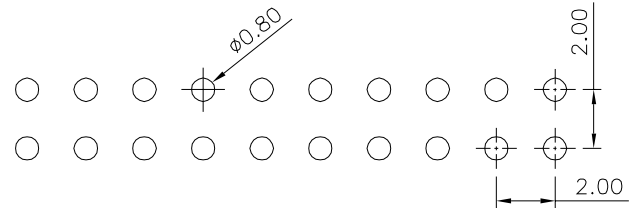
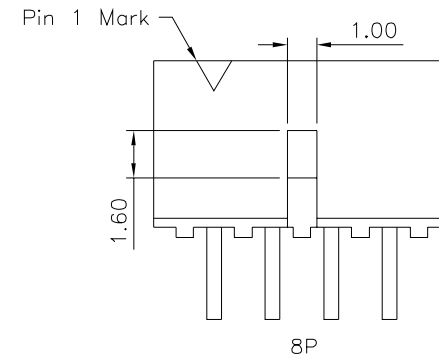
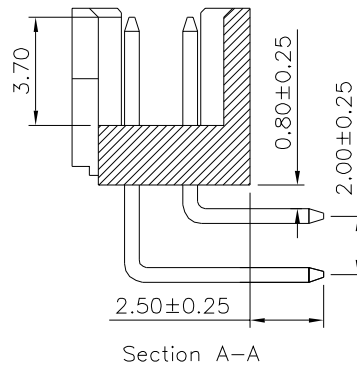


SPECIFICATION
 Current Rating:2.0A
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 ⚠ Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

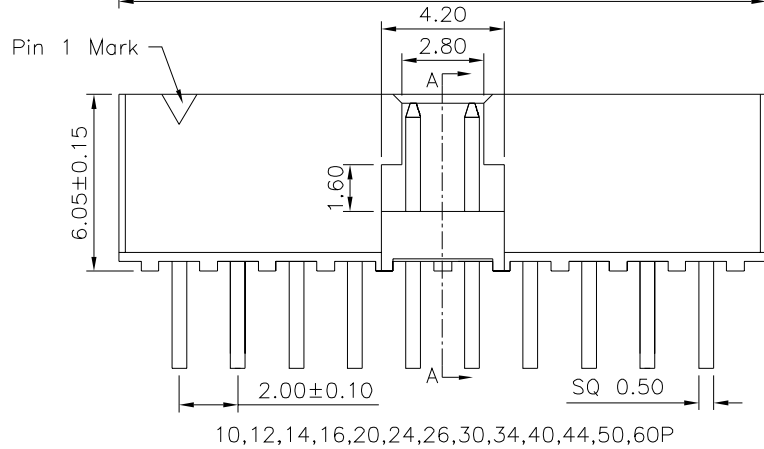

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance ± 0.05)

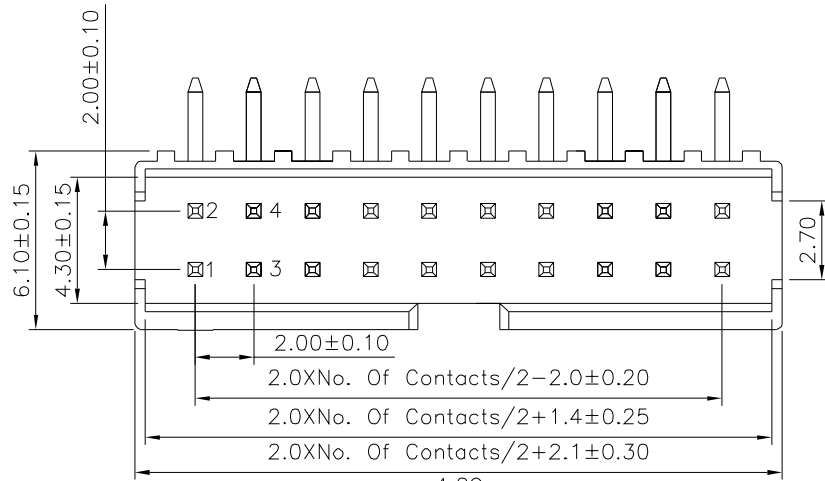

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21827

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

SCALE NONE

REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ± 0.40
 .XX ± 0.25
 .XXX ± 0.15
 ANG. $\pm 3^\circ$

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	09/27/2024
⚠ A0		NEW RELEASE	HZF	08/14/2016