
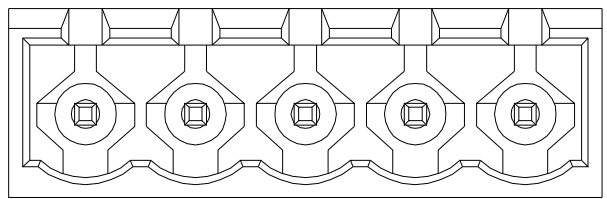
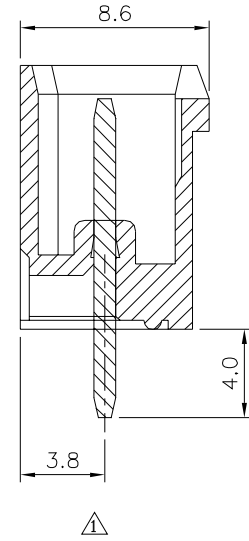


Recommended P.C.B. Layout

△ SPECIFICATION
 Voltage Rating:300V AC
 Current Rating:16A
 Withstanding Voltage:2500V AC(1 Minute)
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:+250°C,5 Seconds Max.
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant

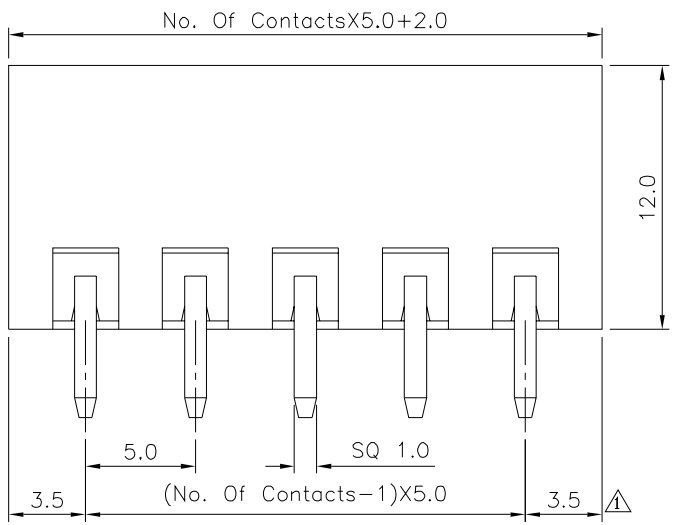

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X° ±1°
21833		EMILY		
		CHECKED BY		
		HZF		
DRAWING BY		HAO		UNIT
SCALE	NONE	REV.	A2	mm

NO.	REV.	REVISIONS	CHK	DATE
	A2	Modify Data	HZF	03/11/2015
	A1	Modify Data	HZF	01/31/2012
	A0	NEW RELEASE	HZF	06/27/2010