


SPECIFICATION

⚠ Current: 2.1A Max.
 Voltage: 30V Max.
 Withstanding Voltage: 500V AC
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Temperature Range: -55°C ~ +85°C
 Mating Force: 35N Max.
 Withdrawal Force: 10N Min.
 Durability: 1500 Cycles Min.
 Contact: Brass
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails, Over Nickel
 Insulator: LCP+30%G.F.(UL94V-0), Nature
 Shell: Brass, Nickel Plated Over All
 RoHS Compliant

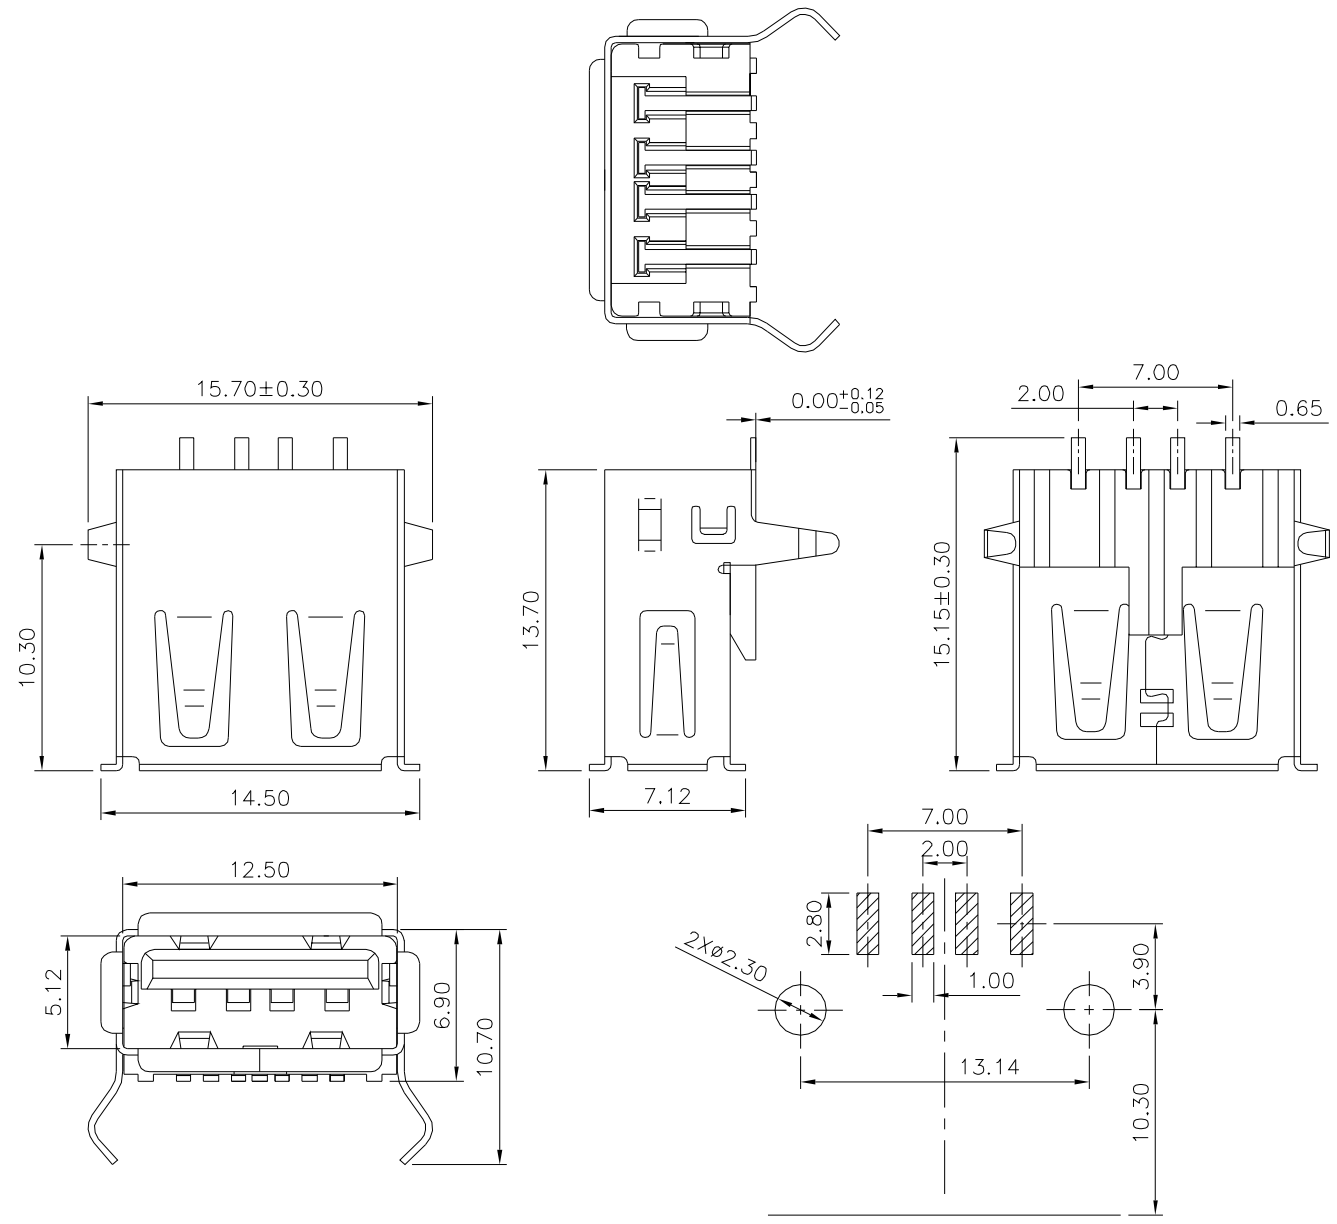

⚠ Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .X* ±2* .XX ±0.25 .XX* ±1* .XXX ±0.13 .XXX* ±0.5*
21910		MEI		
		CHECKED BY HZF		
DRAWING BY HAO		REV. A1		UNIT mm
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	07/30/2015
⚠ A0		NEW RELEASE	HZF	10/25/2012