

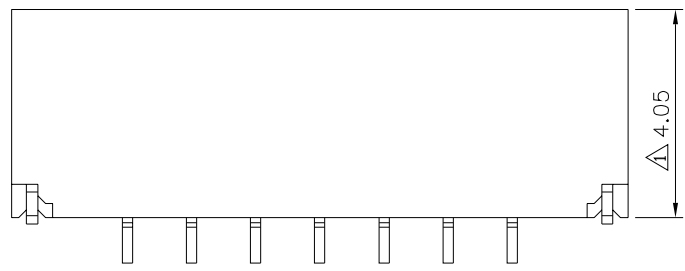
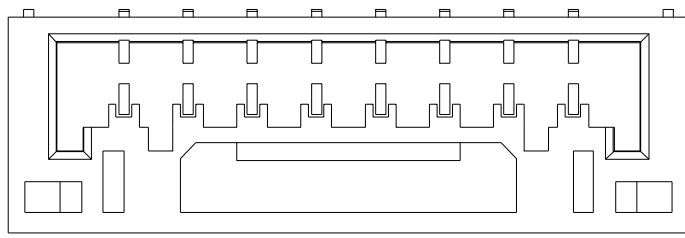


**△ SPECIFICATION**  
 Current Rating:1A AC,DC  
 Voltage Rating:50V AC,DC  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 Operation Temperature:-25°C~+85°C  
 Contact:Phosphor Bronze,Tin Plated  
 Insulator:PA6T(UL94V-0),Beige  
 RoHS Compliant

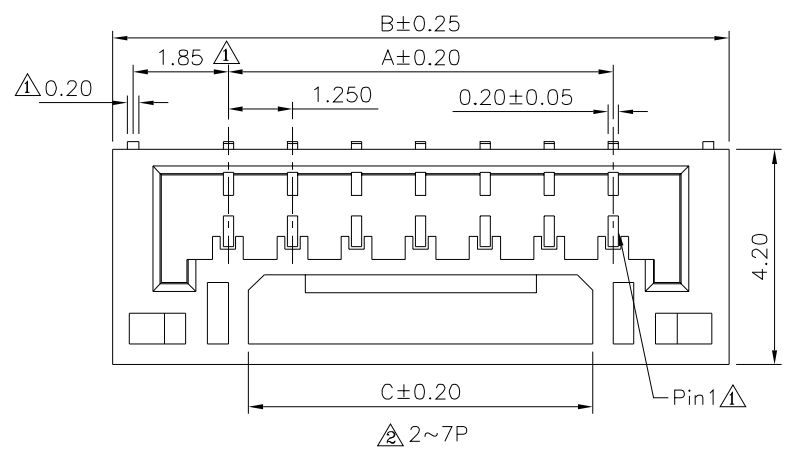

△ Pin	A	B	C
02	1.25	5.75	2.20
03	2.50	7.00	3.30
04	3.75	8.25	4.55
05	5.00	9.50	4.55
06	6.25	10.75	6.55
07	7.50	12.00	6.55
08	8.75	13.25	6.55
09	10.00	14.50	6.55
10	11.25	15.75	8.55
11	12.50	17.00	8.55
12	13.75	18.25	8.55

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 21960  
 APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 SCALE NONE REV. A2  
 UNIT mm  
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG. ±1°

NO.	REV.	REVISIONS	CHK	DATE
△ 2	A2	Modify Data	HZF	12/03/2019
△ 1	A1	Modify Data	HZF	09/22/2017
△ 0	A0	NEW RELEASE	HZF	02/20/2014