


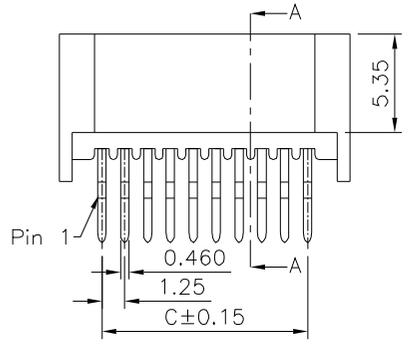
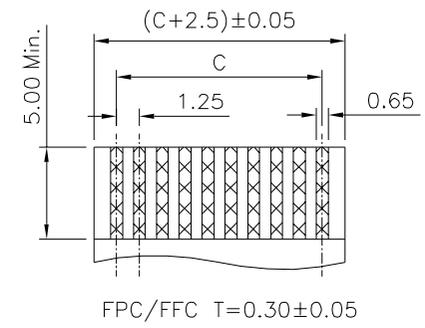


SPECIFICATION

- 1. Material & Finish
 - △ Housing: PA6T (UL94V-0), Black
 - Contact: Phosphor Bronze, Tin Plated Over Nickel
- 2. Electrical Characteristics
 - Current Rating: 1.0A
 - Withstanding Voltage: 500V AC/Minute
 - Insulation Resistance: 500 Megaohms Min.
 - Contact Resistance: 30 Milliohms Max.
- 3. Environmental Characteristics
 - △ Temperature Range: -25°C ~ +85°C
- 4. RoHS Compliant

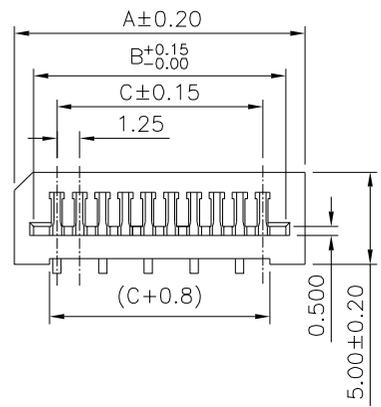

Pin	A	B	C	Pin	A	B	C
2	5.90	3.80	1.25	*17	24.65	22.55	20.00
3	7.15	5.05	2.50	*18	25.90	23.80	21.25
*4	8.40	6.30	3.75	*19	27.15	25.05	22.50
*5	9.65	7.55	5.00	*20	28.40	26.30	23.75
*6	10.90	8.80	6.25	*21	29.65	27.55	25.00
*7	12.15	10.05	7.50	*22	30.90	28.80	26.25
*8	13.40	11.30	8.75	23	32.15	30.05	27.50
*9	14.65	12.55	10.00	*24	33.40	31.30	28.75
*10	15.90	13.80	11.25	25	34.65	32.55	30.00
*11	17.15	15.05	12.50	26	35.90	33.80	31.25
*12	18.40	16.30	13.75	*27	37.15	35.05	32.50
*13	19.65	17.55	15.00	*28	38.40	36.30	33.75
*14	20.90	18.80	16.25	29	39.65	37.55	35.00
*15	22.15	20.05	17.50	*30	40.90	38.80	36.25
*16	23.40	21.30	18.75				

The Mark Of "*" Are Tool

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.20 .XX ±0.10 .XXX ±0.05
21965		EMILY		
		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		UNIT mm
REV. A1				

△ A1	Modify Data	HZF	07/08/2024
△ A0	NEW RELEASE	HZF	03/01/2020
NO. REV.	REVISIONS	CHK	DATE