| File No. | 529LC03806 | SHEET | 1/1 |
|---|---|---|---|




Recommended P.C.B Layout
Tolerance:±0.05




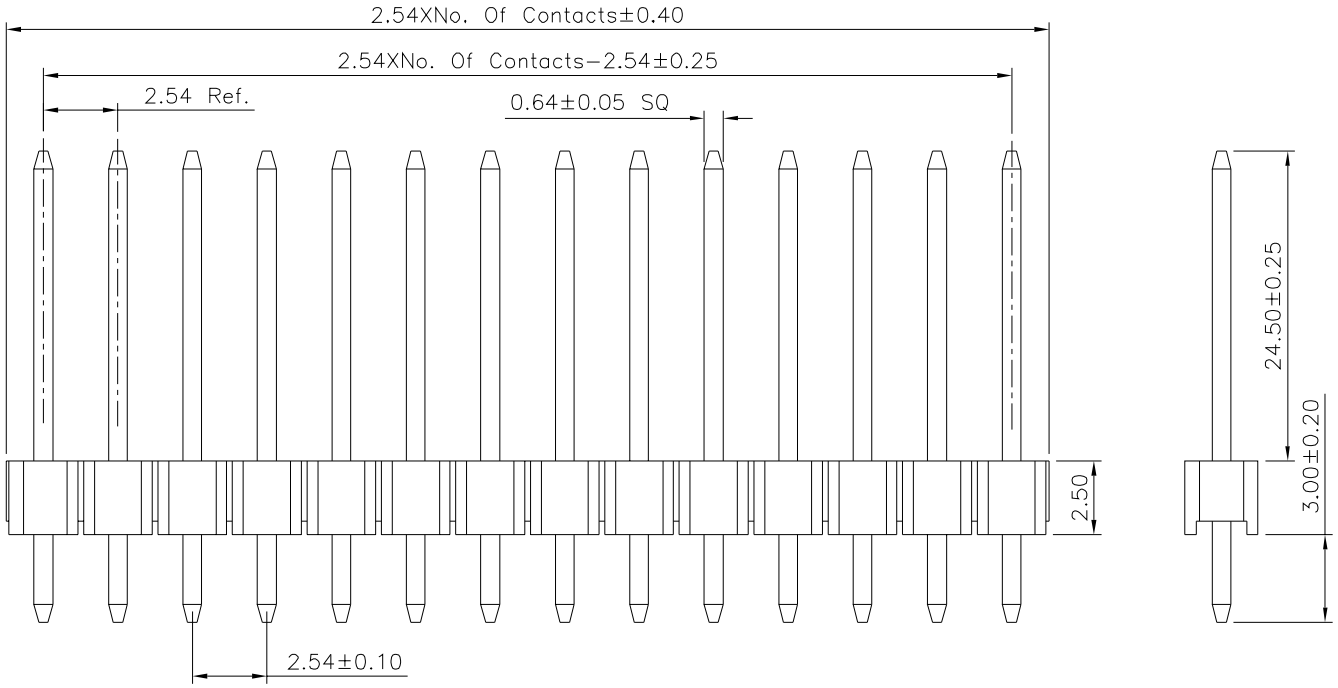


## SPECIFICATION

Current Rating:3.0 Amp/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V−0),Black
RoHS Compliant

**4UCON** 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. | APPROVED BY | CHECKED BY | DRAWING BY |
|---|---|---|---|
| 22067 | EMILY | HZF | GAO |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±5°

| SCALE | NONE | REV. | A0 | UNIT | mm |
|---|---|---|---|---|---|

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 0 | A0 | NEW RELEASE | HZF | 03/03/2021 |