

SPECIFICATION

Current Rating:3 Amps

Withstand Voltage:500V AC

Contact Resistance: 20 Milliohms Max.




Insulation Resistance: 1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact:Brass,Gold Flash Over Nickel

Insulator:PA6T(UL94V-0),Black

RoHS Compliant

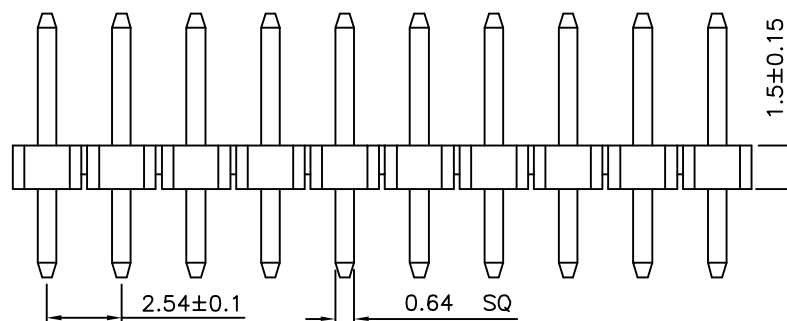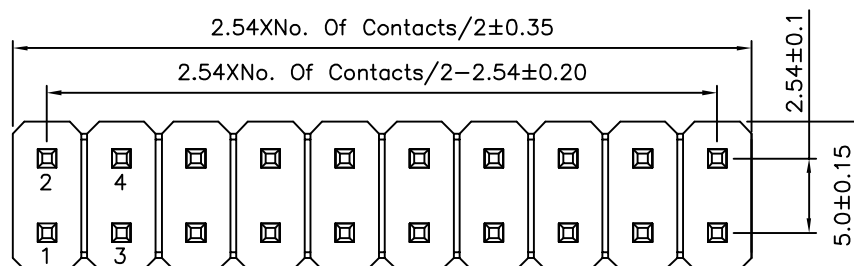

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22114

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

AO

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE

X. ± 0.25	X.* $\pm 2^{\circ}$
---------------	---------------------

	$.X \pm 0.20$	$.X^* \pm 1.5^*$
	$.X \pm 0.15$	$.X \pm 1.0$

.XX ±0.15	.XX* ±1°
-----------	----------

.XXX ±0.10	.XXX* ±0.5*
------------	-------------

UNIT



5°		AO
	NO	REV

AO	
----	--

NEW

RELEASE

HZF

11/30/2015

Δ	AD
NO	REV

REVISIONS

CHK

11/30/2013
DATE