| File No. | 697LD14806 | SHEET | 1/1 |
|---|---|---|---|

## SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:−40°C~+105°C
Insulator:PA6T(UL94V−0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

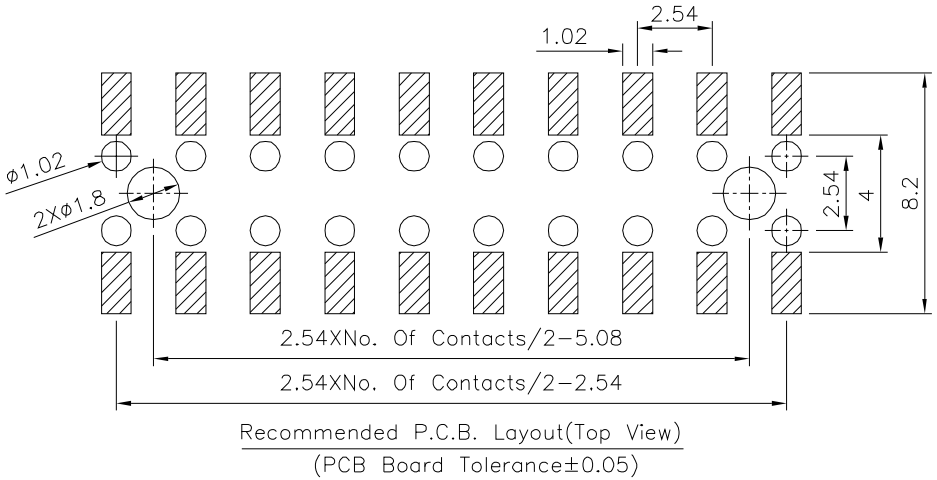


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

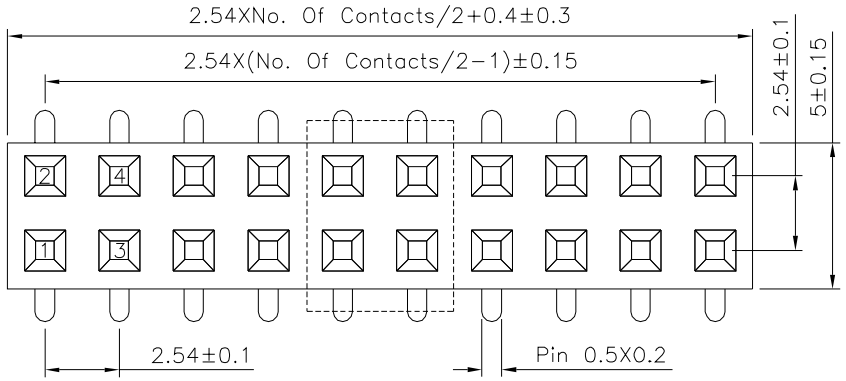


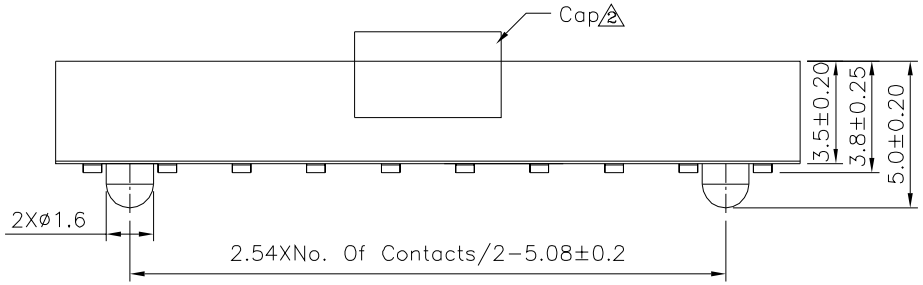





△1 2X02 Pin




**4UCON** 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. | | APPROVED BY | MEI |
|---|---|---|---|
| 22159 | | CHECKED BY | HZF |
| | | DRAWING BY | CYP |
| SCALE | NONE | REV. | A1 |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

| | | | |
|---|---|---|---|
| X. ±0.25 | X.° ±2° | | |
| .X ±0.20 | .X° ±1.5° | | |
| .XX ±0.15 | .XX° ±1° | | |
| .XXX ±0.10 | .XXX° ±0.5° | | |

UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| △2 | A2 | Modify Data | HZF | 04/14/2021 |
| △1 | A1 | Modify Data | HZF | 08/26/2015 |
| △0 | A0 | NEW RELEASE | HZF | 07/02/2014 |