

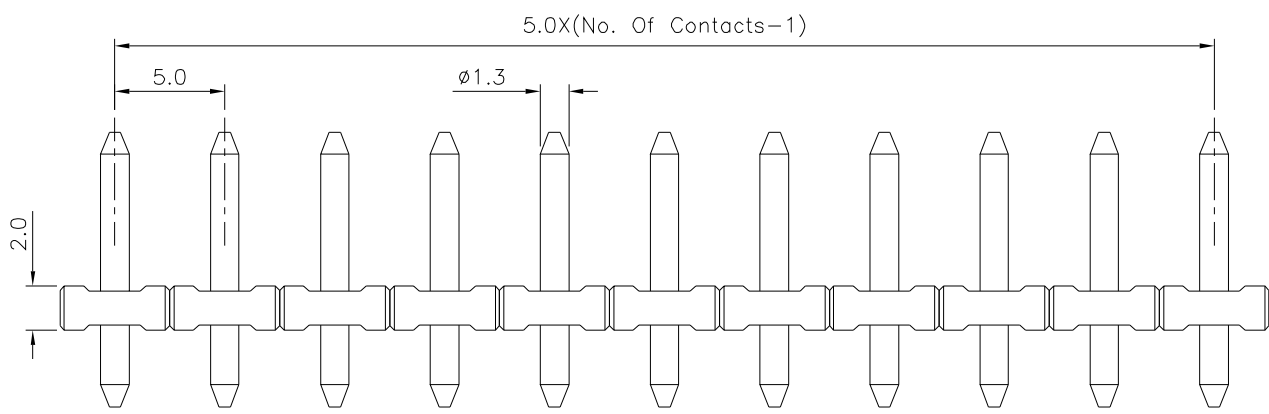


Recommended P.C.B. Layout

SPECIFICATION

Voltage Rating:300V AC
 Current Rating:10 Amps/Way Max.
 Withstanding Voltage:2500V AC(1 Minute) Test
 Time=60s/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:
 Test Temperature=250°C±10°C/5 Seconds Max.
 Solder Pin:Copper Alloy,Gold Flash Over All,Over Nickel
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Black
 RoHS Compliant

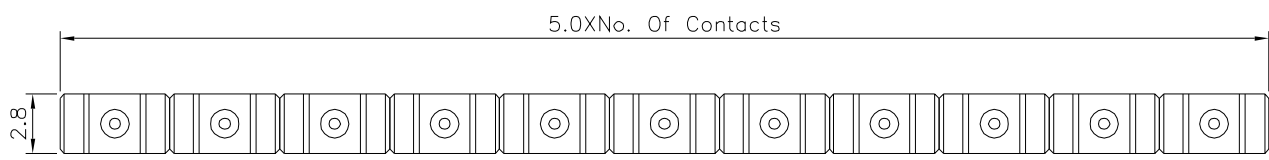

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
22162		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	01/28/2021