



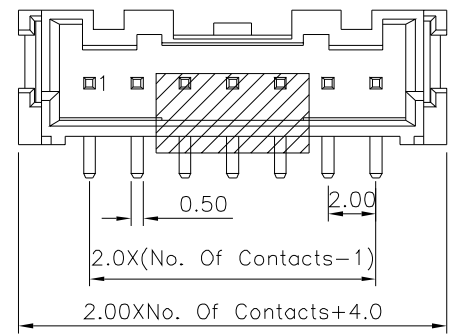


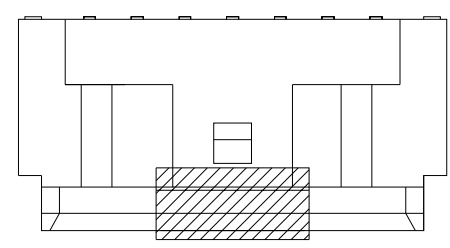


SPECIFICATION
 Current Rating:3A AC/DC Max.
 Voltage Rating:250V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Dielectric Withstanding Voltage:800V AC/Minute
 Temperature Range:-25°C~+85°C
 Insulator:PA6T(UL94V-0),Nature
 Pin:Brass,Tin Plated
 Solder Tab:Brass,Tin Plated
 RoHS Compliant



2 ~ 6P

10 ~ 15P

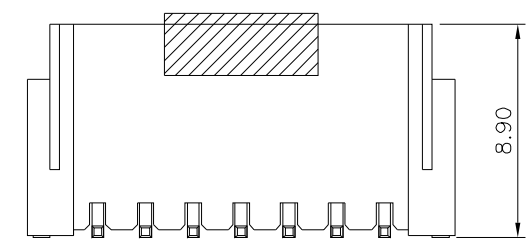

7 ~ 9P

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.


DRAWING No.
 22164

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10

SCALE NONE

REV. A0



NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	08/28/2016