

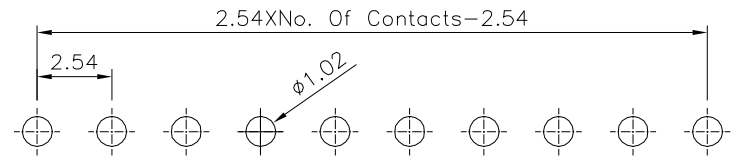
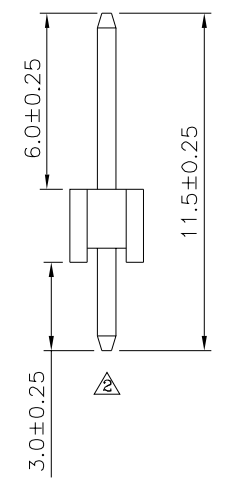


△ SPECIFICATION
 Current Rating: 3 Amp
 Withstanding Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PBT (UL94V-0), Black
 RoHS Compliant

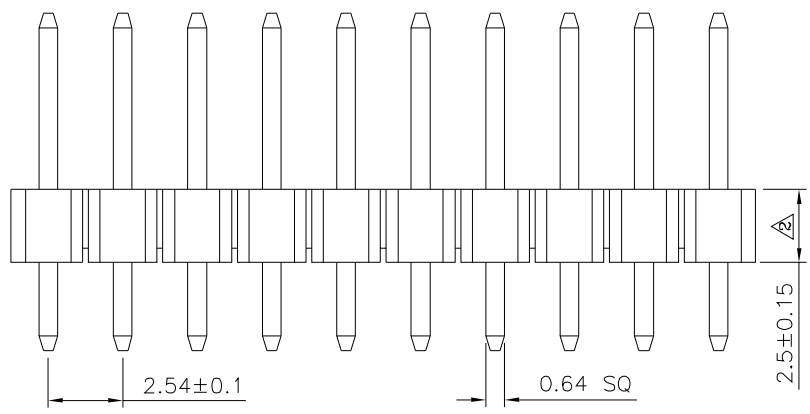

△ Recommended P.C.B. Layout (Top View)
 (PCB Board Tolerance ±0.05)

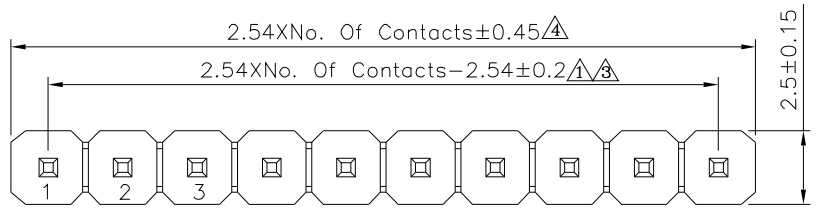

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △	△ A4	Modify Data	HZF	01/04/2017
22364		EMILY			△ A3	Modify Data	HZF	02/09/2015
		CHECKED BY			△ A2	Modify Data	HZF	04/14/2014
SCALE		NONE		△ A1	Modify Data	HZF	02/22/2011	
		REV.		A4	△ A0	NEW RELEASE	HZF	12/09/2009
				UNIT	NO. REV.		REVISIONS	CHK
				mm				DATE

SCALE		NONE		REV.		A4	UNIT		mm	
							NO. REV.		REVISIONS	
									CHK	
									DATE	