


# SPECIFICATION

Current Rating:3.0A Max.  
Voltage Rating:32V  
Withstand Voltage:1000V AC  
Insulation Resistance:1000 Megaohms Min. 500V DC  
Operation Temperature:-20°C~+85°C  
Top Cover Color Option:BL,Wire Size:20~22AWG  
Wire OD:1.2~1.6  
Wire Insulation:Flexible Vinyl,Semi-Flexible  
Vinyl,Polyethylene,Or PTFE For Approved Cables  
RoHS Compliant

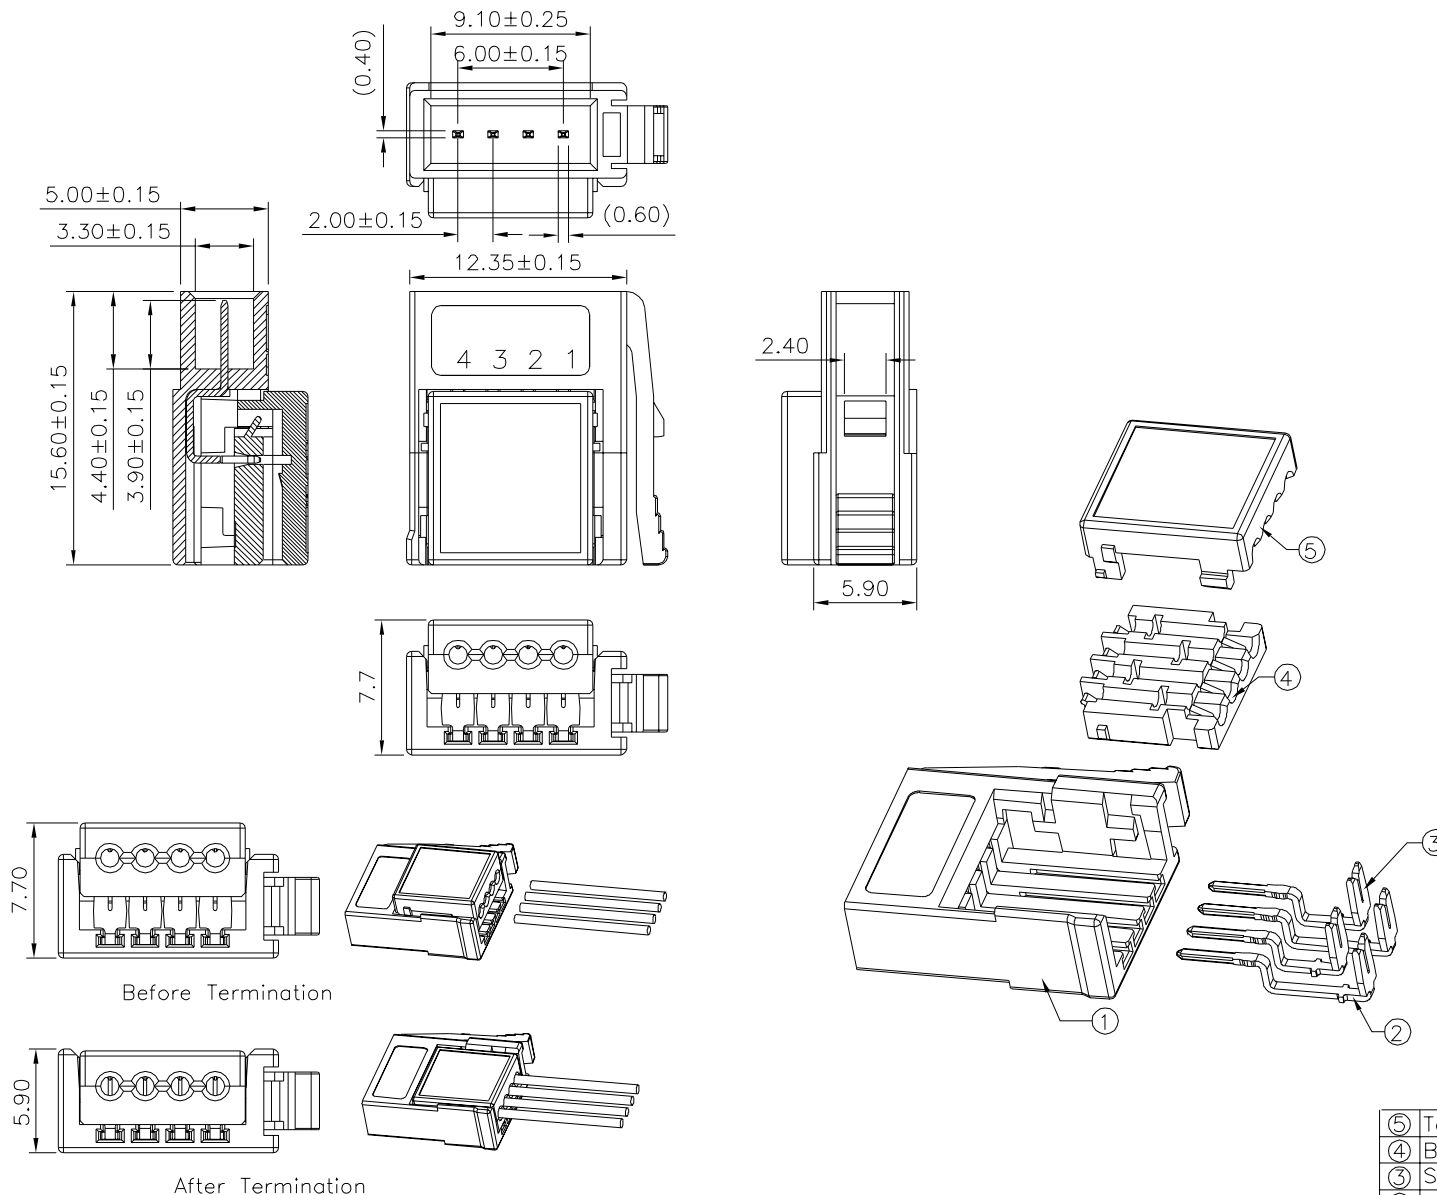

|     |               |      |             |                                                                            |
|-----|---------------|------|-------------|----------------------------------------------------------------------------|
| ⑤   | Top Cover     | 1    | PC          | Blue                                                                       |
| ④   | Bottom Cover  | 1    | PA66        | White                                                                      |
| ③   | Short Contact | 2    | Brass       | Gold Plated 5u" On Contact Area,<br>Tin Plated On Solder Tails,Over Nickel |
| ②   | Long Contact  | 2    | Brass       | Tin Plated Over Nickel                                                     |
| ①   | Housing       | 1    | PBT,UL94V-0 | Black                                                                      |
| No. | Description   | Q'ty | Material    | Remark                                                                     |

**4U CON** 元化興業股份有限公司  
4U CON TECHNOLOGY INC.

DRAWING No.

22373

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

LZX

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.40  
.XX ±0.25  
.XXX ±0.15  
ANG. ±3°

SCALE

NONE

REV.

A0

UNIT  
mm



△ A0

NEW RELEASE

HZF

01/27/2022

NO.REV.

REVISIONS

CHK

DATE