

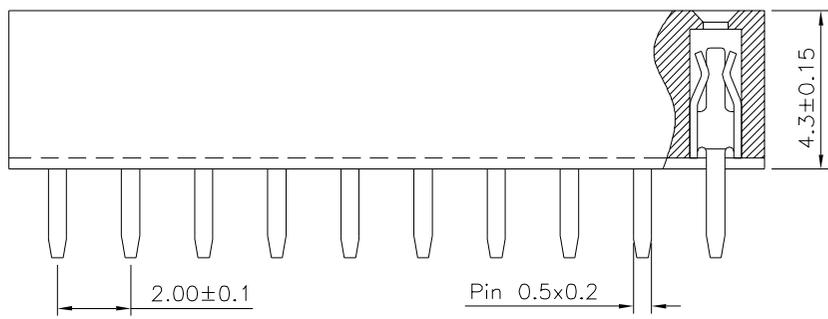


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

SPECIFICATION
 Current Rating: 1.5A
 Withstand Voltage: 500V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 ⚠ Housing: PA9T (UL94V-0), Black
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 RoHS Compliant

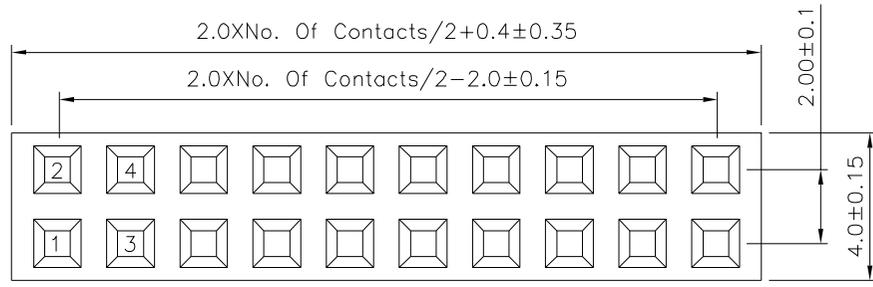

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.* ±2* .X ±0.25 .X* ±1.5* .XX ±0.20 .XX* ±1.0* .XXX ±0.15 .XXX* ±0.5*
22405		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	LZX	
REV.	A1	UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	10/19/2023
2	A0	NEW RELEASE	HZF	03/19/2022