

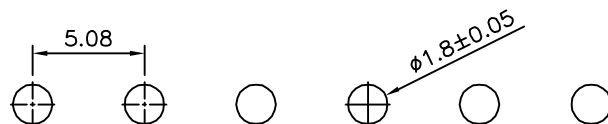
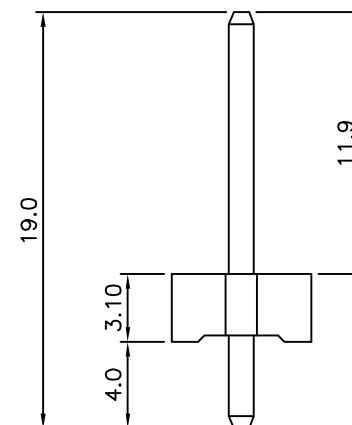


SPECIFICATION

Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Operating Temperature:-25°C~+85°C
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1500V AC/Minute
Contact Resistance:10 Milliohms Max.
Housing:PA66(UL94V-2),Nature
Contact:Brass,Tin Plated
RoHS Compliant

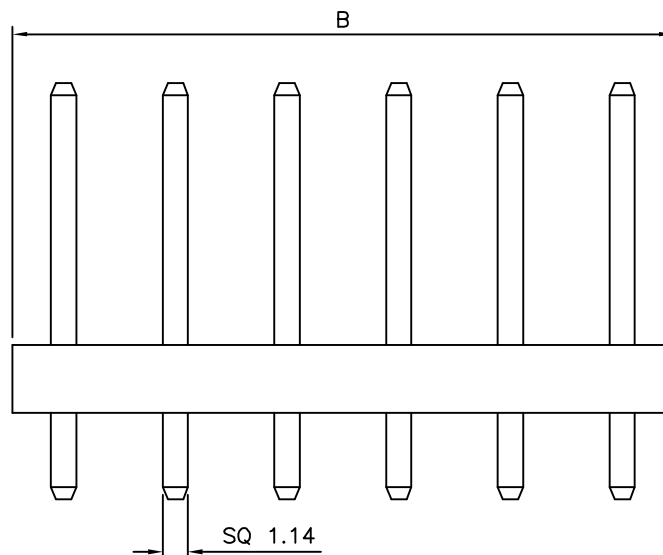

Recommended P.C.B. Layout(Component Side)

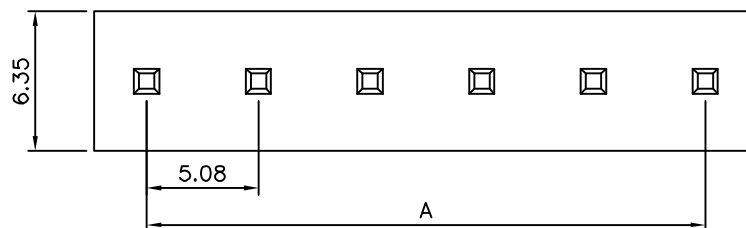

Pin	A	B
02	5.08	10.30
03	10.16	15.40
04	15.24	20.50
05	20.32	25.60
06	25.40	30.70
07	30.48	35.80
08	35.56	41.00
09	40.64	46.10
10	45.72	51.20

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22440

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.5
.XX ± 0.3

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

11/21/2014