

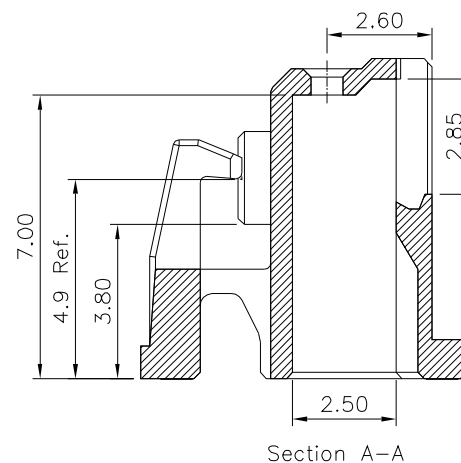
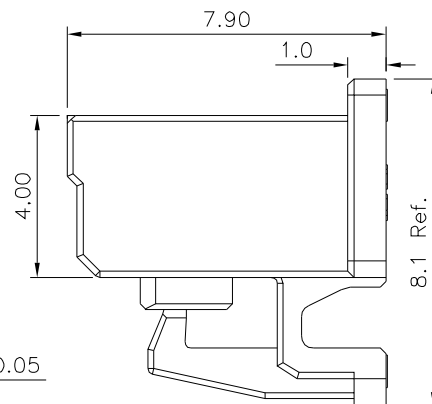
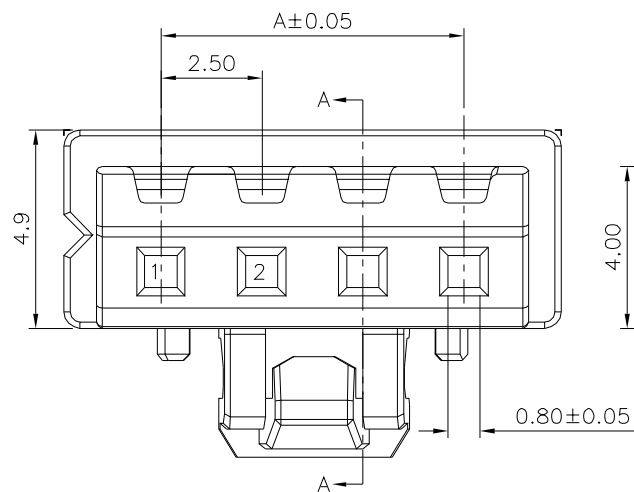





### SPECIFICATION

Current Rating:3A AC,DC  
Voltage Rating:250V AC,DC  
Withstand Voltage:1000V AC/Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Temperature Range:-25°C~+85°C  
Insulator:PA66(UL94V-O),White  
RoHS Compliant

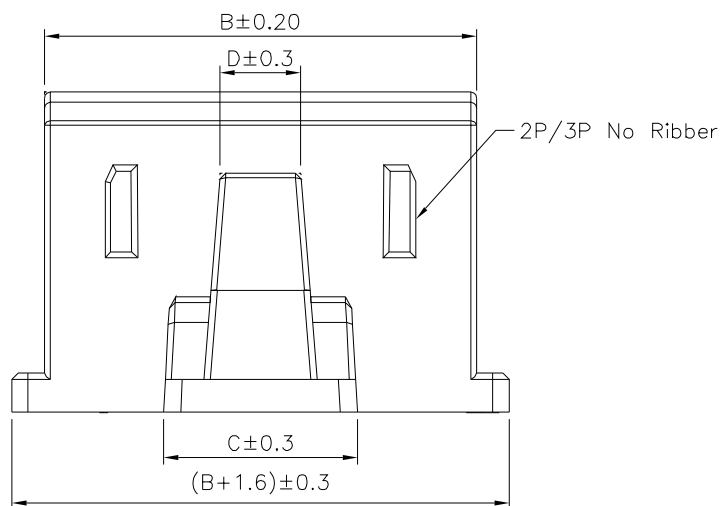

Make Triangle  
Marks Every Other  
5Pin



Pin Direction View

| Pin | A     | B     | C    | D    |
|-----|-------|-------|------|------|
| 2   | 2.50  | 5.70  | 3.00 | 1.45 |
| 3   | 5.00  | 8.20  | 4.00 | 1.95 |
| 4   | 7.50  | 10.70 | 4.80 | 2.00 |
| 5   | 10.00 | 13.20 | 7.30 | 4.50 |
| 6   | 12.50 | 15.70 | 9.80 | 7.00 |
| 7   | 15.00 | 18.20 | 9.80 | 7.00 |
| 8   | 17.50 | 20.70 | 9.80 | 7.00 |
| 9   | 20.00 | 23.20 | 9.80 | 7.00 |
| 10  | 22.50 | 25.70 | 9.80 | 7.00 |
| 11  | 25.00 | 28.20 | 9.80 | 7.00 |
| 12  | 27.50 | 30.70 | 9.80 | 7.00 |
| 13  | 30.00 | 33.20 | 9.80 | 7.00 |
| 14  | 32.50 | 35.70 | 9.80 | 7.00 |
| 15  | 35.00 | 38.20 | 9.80 | 7.00 |
| 16  | 37.50 | 40.70 | 9.80 | 7.00 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

22455

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.30  
.XX ±0.20  
.XXX ±0.10  
ANG. ±2°

SCALE

NONE

REV.

A0

UNIT  
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

06/15/2022

DATE