
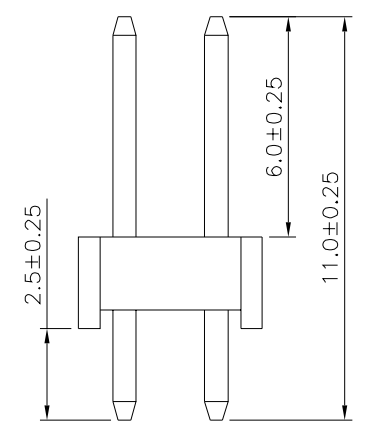
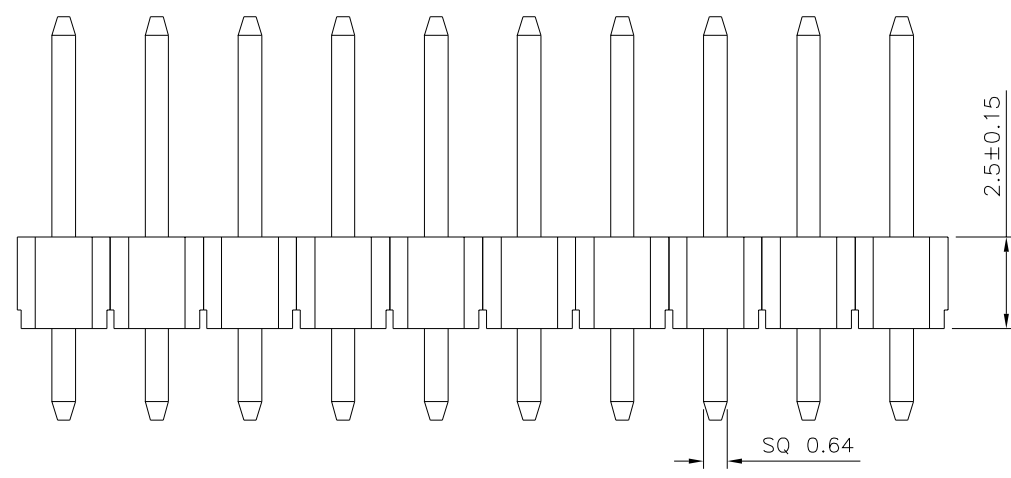


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

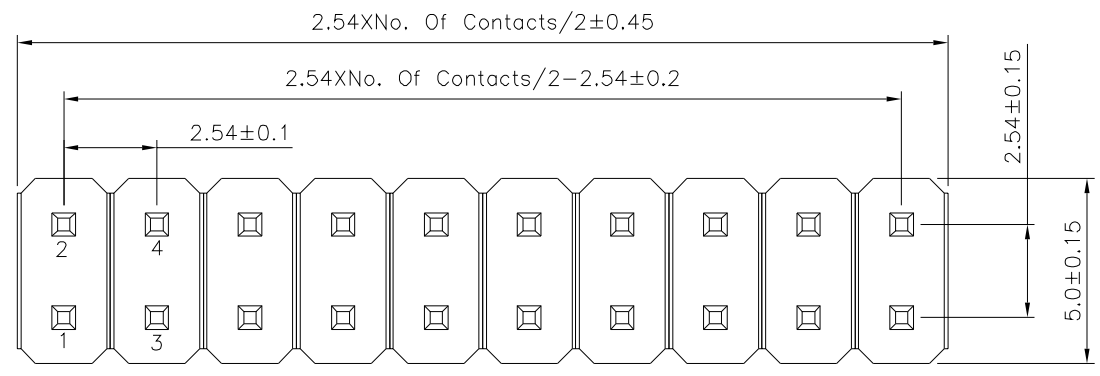

**SPECIFICATION**  
 Current Rating:3 Amps  
 Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature Range:-40°C~+105°C  
 Insulator:PA9T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X: ±0.30 X.: ±2* .X ±0.25 .X' ±1.5* .XX ±0.20 .XX' ±1.0* .XXX ±0.15 .XXX' ±0.5*
22509		MEI		
		CHECKED BY HZF		
DRAWING BY LZX		REV. A0		NO. REV.
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	03/21/2023