
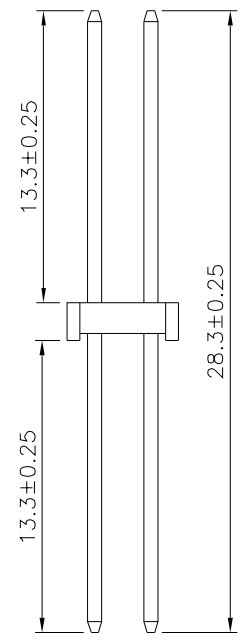
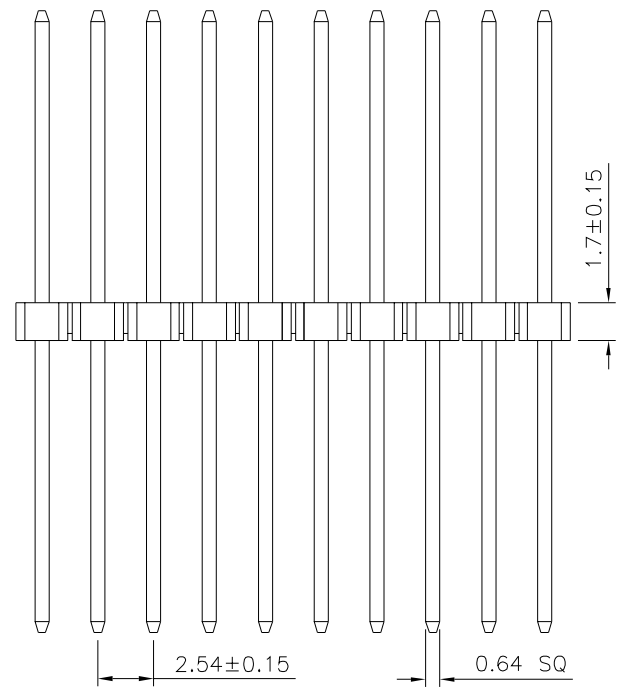


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

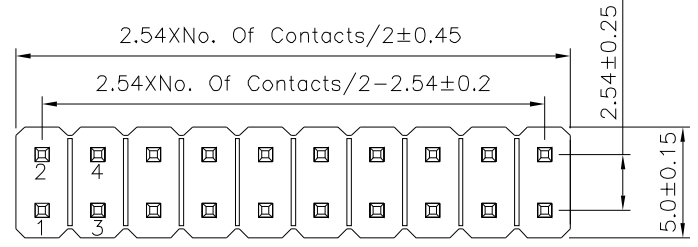

SPECIFICATION
 Current Rating: 3A
 Withstand Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PA9T (UL94V-0), Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 22618

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY LZJ
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.30 X.* ±2*
 .X ±0.25 .X* ±1.5*
 .XX ±0.20 .XX* ±1.0*
 .XXX ±0.15 .XXX* ±0.5*
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	01/10/2024

